





FATEK®

FATEK AUTOMATION CORPORATION

26FL., NO.29, SEC.2, JUNGJENG E. RD.,
DANSHUEI JEN, TAIPEI, TAIWAN, R.O.C. 251

Tel: +886-2-2808-2192
Fax: +886-2-2809-2618
E-mail: sales@fatek.com
tech@fatek.com
<http://www.fatek.com>

* The specifications are subjected to change without prior notice

Since 1992

Advanced Functions, Excellent Quality

FATEK FBS Series

SoC Based Micro-PLC



FATEK® FATEK AUTOMATION CORPORATION


*.....more than a decade
of unsurpassed "Quality" and "Functionality"*



Contents


Features	1
System Configuration	3
Main Functions and Applications	5
■ Communication	
■ High-speed counter (HSC)	
■ High-speed timer (HST)	
■ NC position control	
■ High-speed pulse width modulation (HSPWM)	
■ High-speed interrupt	
■ General purpose PID control	
■ Temperature measurement and PID control	
■ Thumbwheel switch multiplex input	
■ 7/16-segment LED display module	
■ Simple human-machine interface and RFID card	
Instruction Sets	13
■ Sequential instructions	
■ Step ladder instructions (SFC)	
■ Function instructions	
General Specifications	15
■ Environmental specifications	
■ Power supply specifications	
■ Main unit specifications	
■ Digital input (DI) specifications	
■ Digital output (DO) specifications	
Model Specifications	19
■ NC positioning main units (MN)	
■ High-performance main units (MC)	
■ Economical main units (MA)	
■ Digital expansion units	
■ Digital expansion modules	
■ Power supply for expansion modules	
■ Thumbwheel switch input module	
■ 7/16-segment LED display modules	
■ Analog input (AI) modules	
■ Analog output (AO) modules	
■ Analog input/output (AI/O) module	
■ Thermocouple modules	
■ RTD modules	
■ FB-DAP simple human-machine interface	
■ RFID cards	
Peripheral Specifications	24
■ Memory pack	
■ Communication modules (CM)	
■ Communication boards (CB)	
■ Other accessories	
Program Development Tool	26
■ WinProLadder software package	
■ FP-07C handheld programming panel	
Training Box	31
Dimensions	32





High speed and high performance

The FBs-PLC's design incorporates a "System on Chips"(SoC) developed in-house by Fatek Corporation. The chip consists of over 120,000 gates which integrates powerful features such as a Central Processing Unit (CPU), hardware logic processor, five high-speed communication ports, four sets of hardware high-speed counter / timers, four axes of high speed pulse outputs for NC positioning control (with linear interpolation or dynamic tracking) high speed interrupts, and high speed captured inputs. The FBs represents high functionality and reliability with exceptional value compared to other PLC's in its class.



User friendly and powerful instruction sets

The FBs-PLC has more than 300 instructions which adopts a user friendly and readable multi-input multi-output function structure. As shown, in the left figure, with one instruction three inputs can derive three types of output functions which other brands of PLC's may require the use of many instructions to achieve this. Also the operation result can be directly sent to internal or external outputs. To increase the program readability, the inputs or outputs for each function instruction have their own mnemonic symbol attached and the content of each operand is also displayed. For high-end applications, such as PLC networking (LINK), PID control and NC positioning etc, the FBs-PLC provides dedicated convenient instructions to assist in program development.




Communication function (up to 5 ports including RS232, RS485, USB & Ethernet)

Via the five high-speed communication ports included in the SoC, the FBs-PLC's communication capability is outstanding with all five ports operating at a maximum speed of 921.6Kbps. Communications can be achieved using ASCII code or the double-speed binary code. Along with FATEK's standard protocol, Modbus ASCII/RTU/TCP or user-definable protocol are also available. The FBs-PLC also provides the option of six different communication boards and eight different communication modules for various types of communication applications. With their high speed and functionality the FBs PLC has the greatest number of communication ports than any other PLC in its class. Each communication port comes standard with LED indicators for transmission (TX) and reception (Rx) to enable the user to monitor the operation.




Integrated high-speed counters with counting frequency up to 920 KHz

The FBs-PLC as standard has up to 4 sets of hardware high-speed counters (HHSC) and 4 sets of software high-speed counters (SHSC). The highest counting frequency of a HHSC is 120KHz (MC) or 920KHz (MN). Each HHSC also has a clear and mask function. There are 8 counting modes including U/D, U/Dx2, K/R, K/Rx2, A/B, A/Bx2, A/Bx3 and A/Bx4 which makes the HHSC very powerful and efficient. For example, if the encoder, running at 200 pulses per revolution, adopts A/Bx4 mode the FBs PLC can achieve the same result that a 800 pulses per revolution encoder can provide. The counter is implemented in the hardware so as not to occupy CPU processing time.




NC Control & PLC in one and special NC Position Language

NC Position Control is incorporated into the SoC of the FBs-PLC which integrates PLC+NC control into one unit in order for resources sharing and reducing the need of data exchange. The NC position control adopts special positioning command language, which allows programming by mechanical or electrical units and changing control parameters during execution. One single unit has up to four axes outputs with a maximum frequency of 120KHz (MC) or 920KHz (MN) and equipped with multi-axial linear interpolation and dynamic tracking. If combined with the four sets of built-in HHSC, it can achieve positioning control with closed loop precision.



Up to 4 sets of high-speed pulse width modulation (HSPWM) output

The SoC inside the FBs-PLC incorporates four sets of hardware high-speed pulse width modulation outputs with a maximum frequency of 184.32KHz and 18.432KHz with resolutions of 1% and 0.1%, respectively. Different from the PWM function operated by software alone in other brands of PLC, the hardware driven high-speed PWM in the FBs-PLC operates with high precision and stability which provides the user easy control with precise accuracy.




High speed timers (HST)

The FBs-PLC is the only PLC in this class providing 0.1mS high-speed timers (the FBs-PLC having one 16-bit and 4 sets of 32-bit HST). Currently, the fastest time base of high speed timers used in other brands of PLC's is 1mS. By incorporating the interrupt function of the FBs PLC the accuracy of 0.1mS time base high-speed timer of FBs-PLC is further enhanced and can easily achieve more precise speed detection or can be used as a frequency meter. In most cases, expensive speed detection equipment can be replaced by the economical FBs PLC.




Single unit with 16 points of high-speed interrupts

The FBs-PLC provides 16 points of external interrupts. The interrupt is edge driven and the user can define which edge triggers the interrupt and can be positive, negative or both edges. The interrupts can perform high speed, emergency processing which can withstand the time jitter caused by the delay and deviation of the scan time and can be used for precision high speed positioning, machine home and high speed RPM measurement applications.




Up to 36 point captured inputs

The SoC in the FBs-PLC has a capture input function, which captures and stores the external pulse of an input shorter than the scanning time of the CPU. Compared to PLC's in this class that either lack this capability or require highly sophisticated interrupt functions (which increase the CPU processing time), the FBs-PLC can handle this task easily as a general input, easily configured with high efficiency and no detriment to the CPU scan time.




Complete range of peripherals

In addition to the 204 models of main CPU units, the FBs-PLC also provides 65 models of expansion I/O for selection. The expansion I/O modules include basic DI/O and AI/O, 7/16-segment LED display module, 8 types (J,K,R,S,E,T,B,N) thermocouple, Pt100, Pt1000 RTD temperature measurement modules. The FBs-PLC also provides a FB-DAP LCD data access panel which can be linked together with a single RS485 bus. The FB-DAP can be a simple Timer/Counter editor or it can also be used as a simple human machine interface through the function of user definable keys and message display. The FB-DAP can be equipped with a wireless RFID sensing module and can be applied to such applications as entrance control, parking equipment and elevator control amongst others.




Open communication driver


The open communication protocol of the FBs-PLC is supported by all major brands of graphic supervisory software (SCADA) and leading brands of human-machine interfaces and can be directly connected with the FBs-PLC via serial and Ethernet interface. FATEK also provides Modbus protocol and FATEK DDE standard communication server software for the user to easily connect the FBs-PLC to various control or supervisory systems.



User-friendly operating environment

"WinProladder" is the Windows-based ladder diagram programming software for the FBs-PLC. It provides a user-friendly operating environment with editing, monitoring and debugging functions which allows the user to become familiar with the operation of the software in a very short time. The powerful editing function of WinProladder, assisted with keyboard, mouse and on-line help (of ladder instructions and operating guide) greatly reduces programming development time. Features which can displays the data registers directly in the ladder diagram and provide multiple status pages for monitoring gives the user the ability to monitor and debug easily.

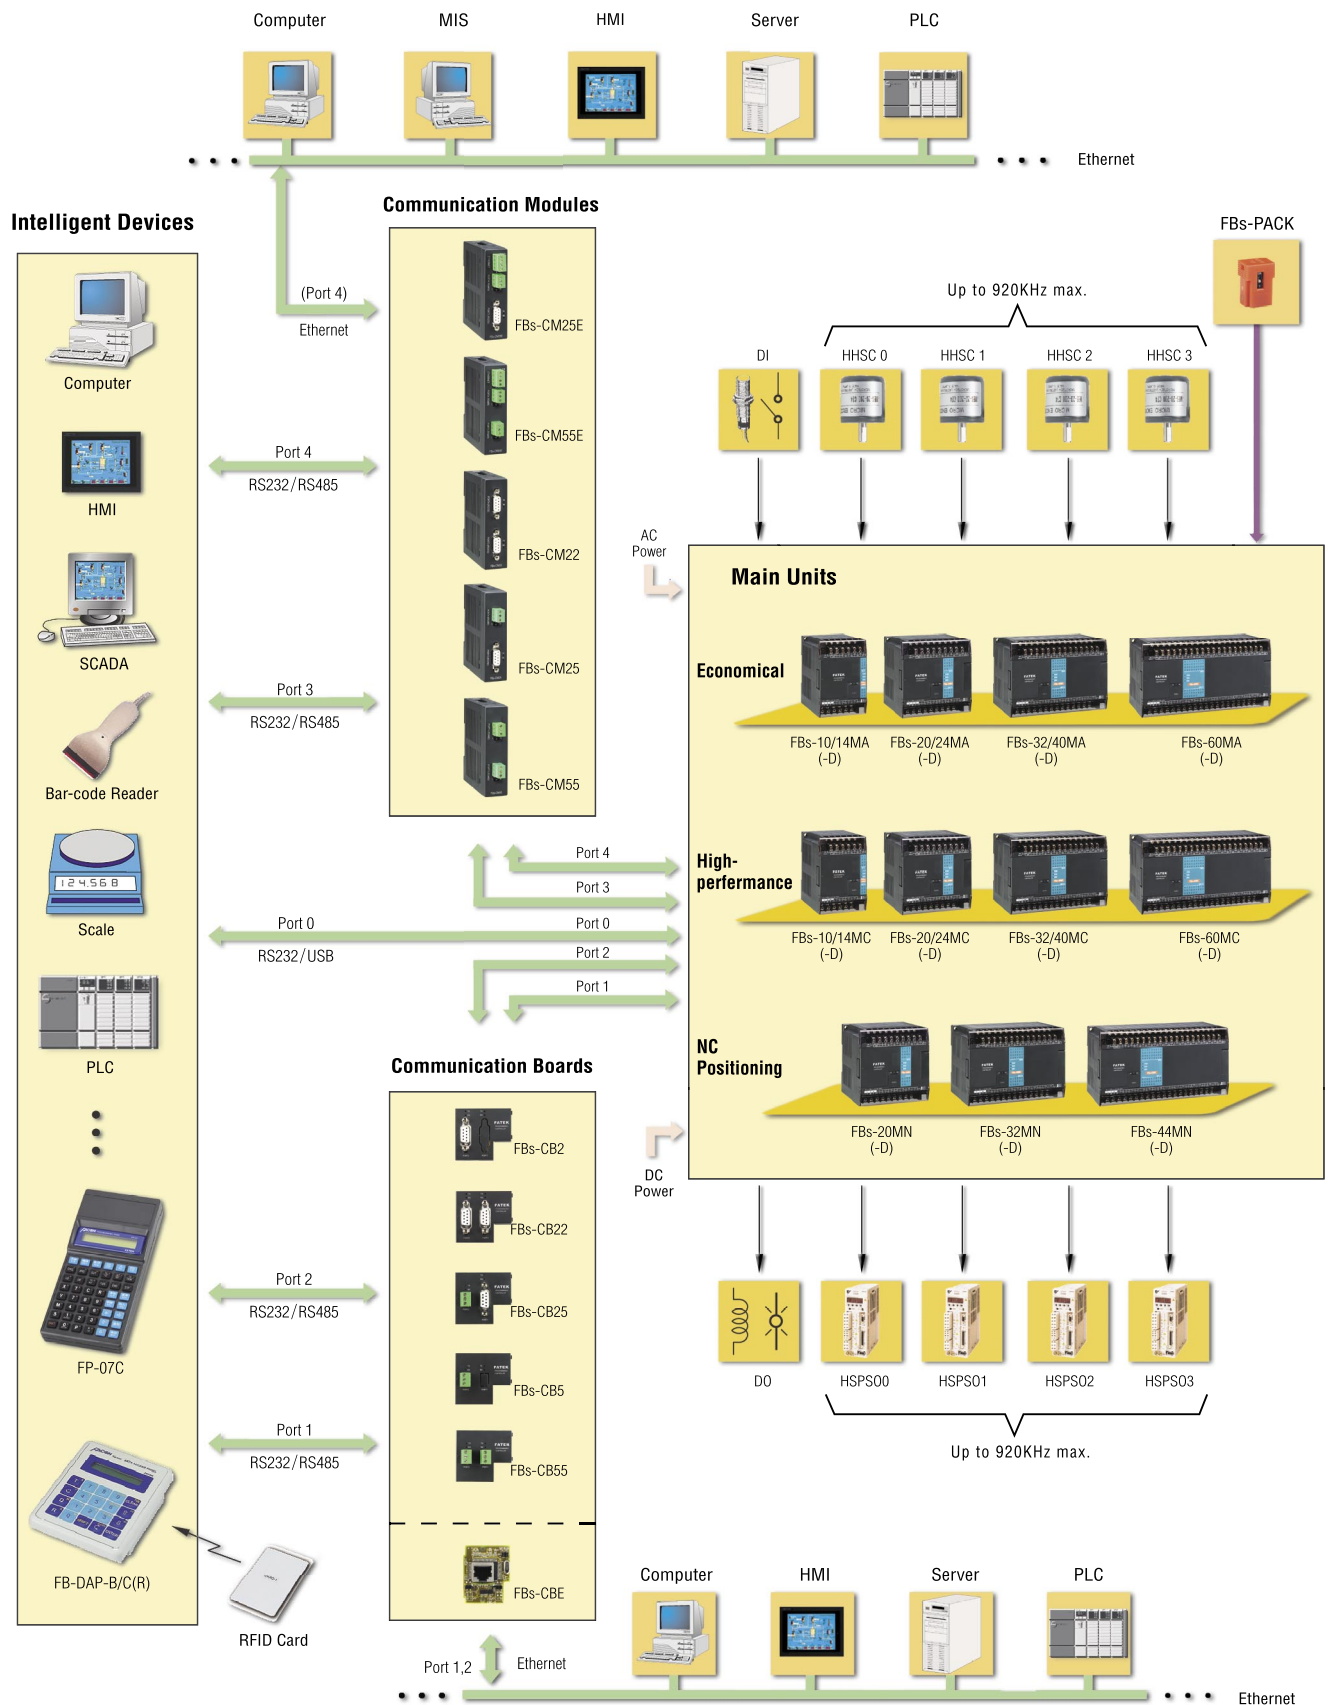

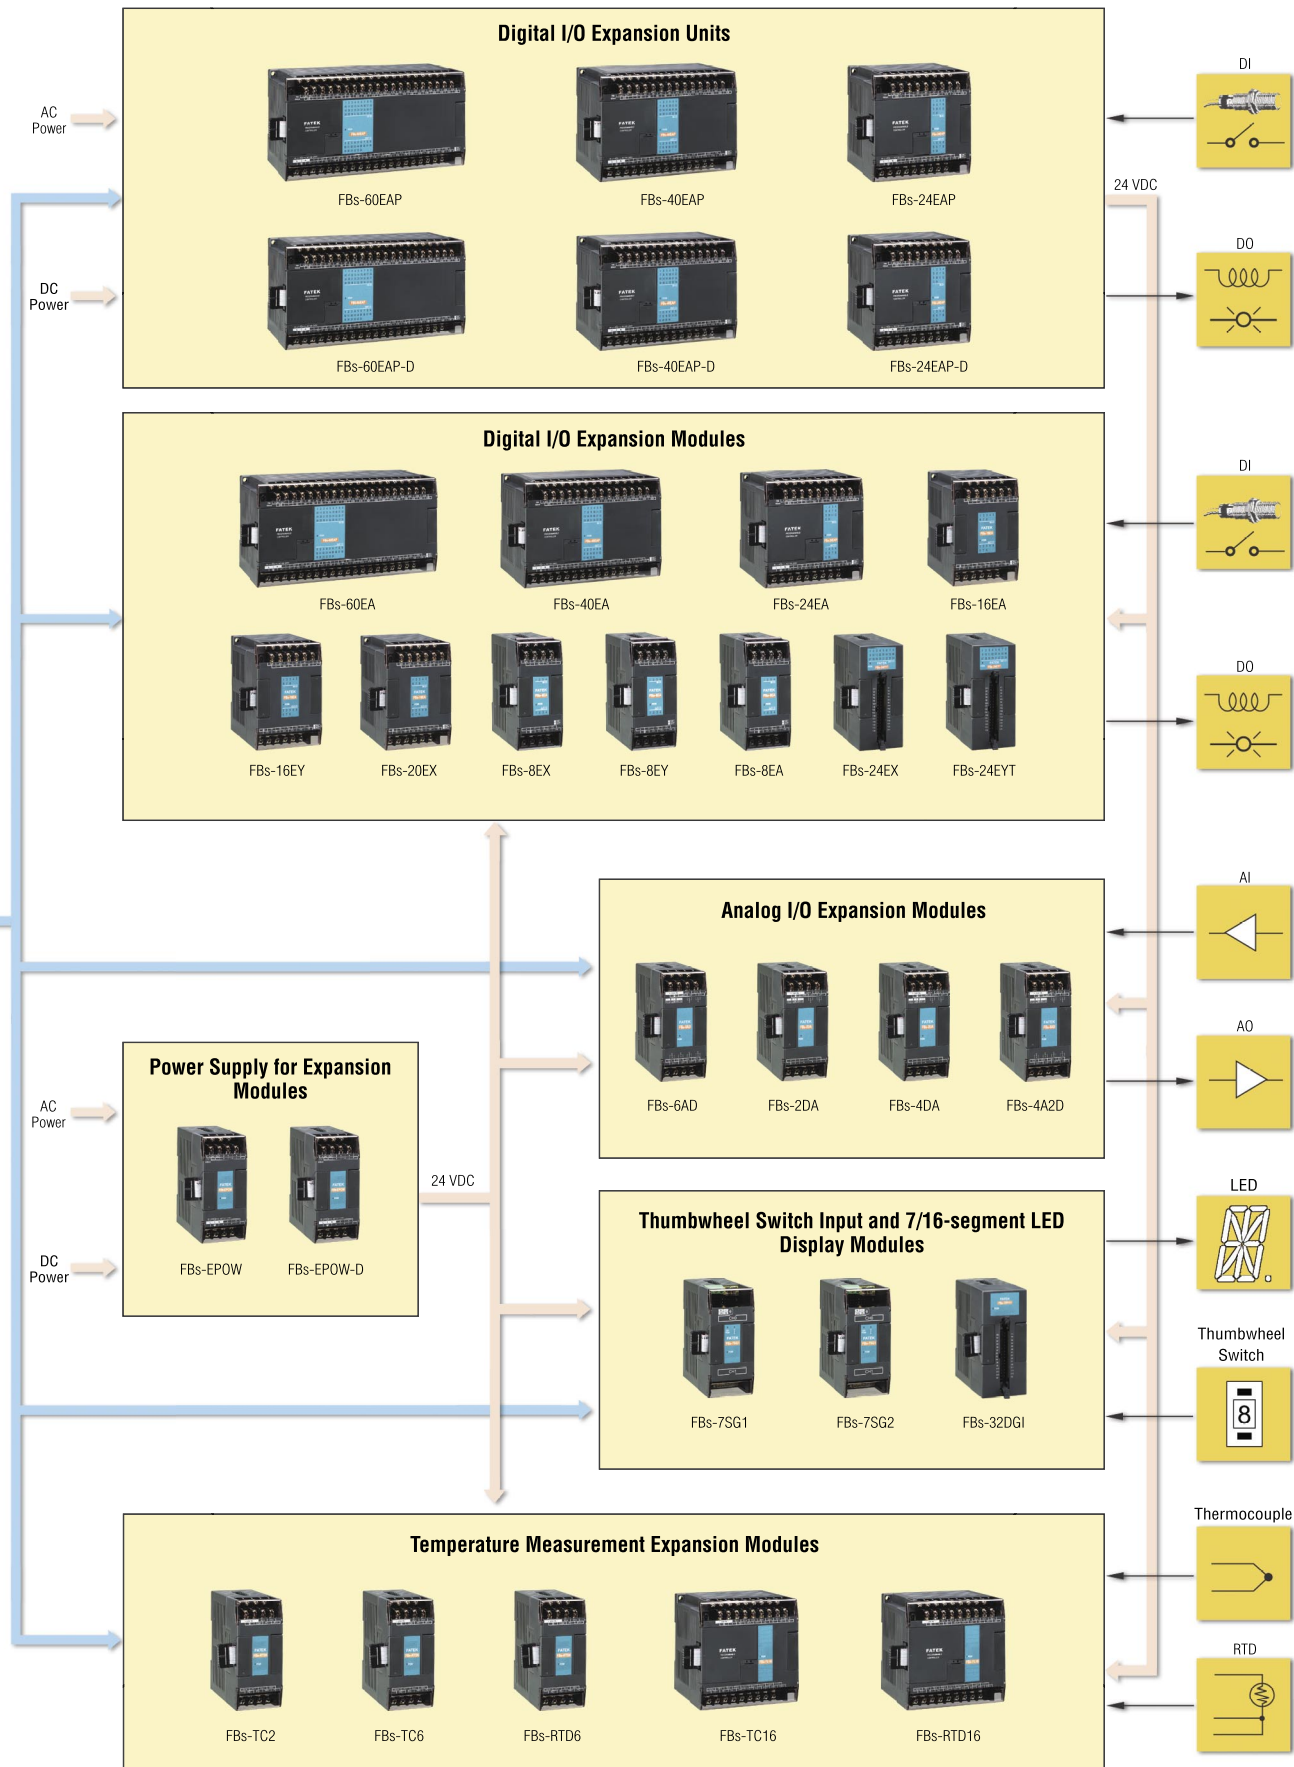


■ Communication

Sample application ●●

● Connection with intelligent peripherals

The five communication ports in FBs-PLC can simultaneously connect to various intelligent peripherals with available interfaces such as USB, RS232, RS485, and Ethernet. Besides adopting FATEK standard communication protocol or Modbus protocol, or conducting communication through the FATEK communication server, the user also can use CLINK commands to define the dedicated protocol to actively or passively establish the connection with any intelligent peripherals.


*Use the RS485 port4 to bridge the Ethernet

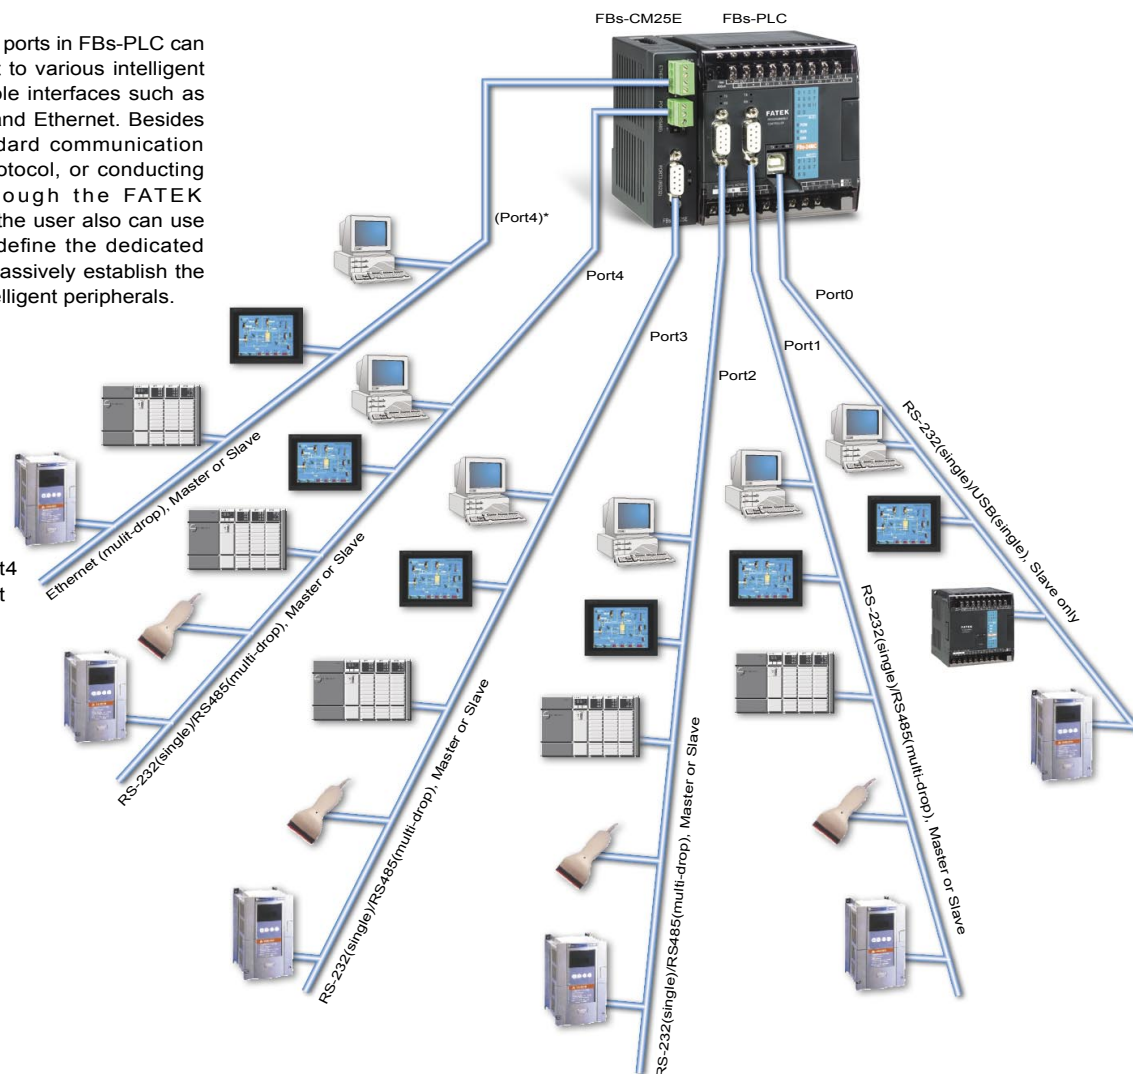

● High-speed CPU link

Port 2 with an optional RS485 interface can be used as the high-speed LINK between up to 254 FATEK PLC units, accomplished with merely one CLINK command at the main station. The communication speed can be up to 921.6Kbps, which is suitable for distributed real time control on multiple PLC units. (Exchange of data in the high-speed common data link areas is exchanged across the network using real-time update.)

Sample application ●●

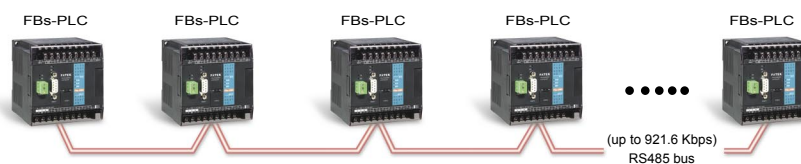


Max. 254 stations(Processed during communication interrupt)

Communication

General CPU link

The RS485 interface in any of ports 1~4 can link up to 254 FATEK PLC units, accomplished with merely one CLINK command in the master FBs PLC. It is suitable for distributed data collection and application of non-real time control. (Any data in the master link table can be exchanged across the network using non real time update.)


Sample application

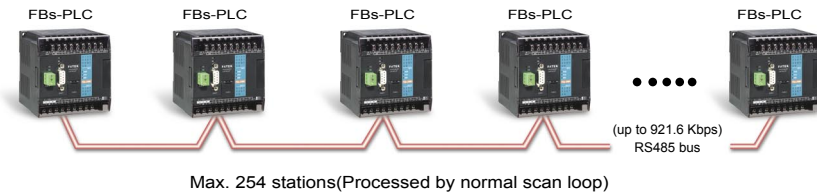

MODEM for remote communication

Through a MODEM, various functions such as remote program modification, control, diagnosis and monitoring can be performed.


Sample application

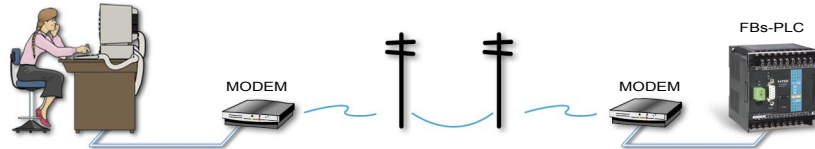

CPU link through MODEM

Through the ladder diagram program, the FBs-PLC can control the MODEM to dial automatically to link with remote MODEM's and PLC's without the intervention of an operator or computer. With this function, the headquarters of company can connect to branch factories automatically to perform the data collection, data monitoring, alarm logging and remote monitoring of the PLC program for fault finding.


Sample application



Calling through pager or mobile phone

In critical or breakdown situations or before an operator becomes aware of a situation, the PLC program can detect and call to alert maintenance personnel or security personnel. This feature is especially suitable for fire alarms and other applications requiring high security.


Sample application

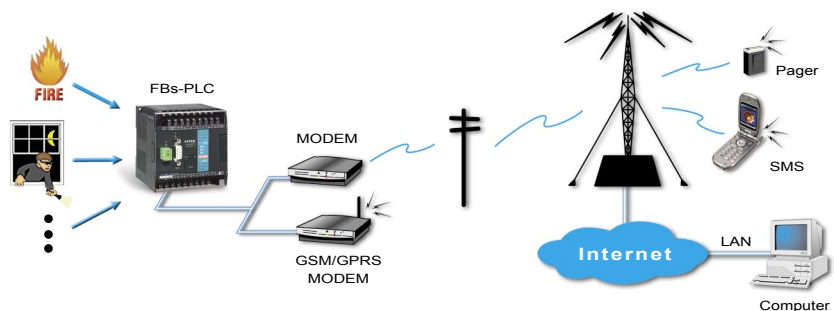

The RS485 REPEATER or HUB can be applied in long distance or special topological routing

Use the REPEATER or HUB of the RS485 interface to meet the variety of wiring topology demands (such as Bus or Star structure) and to extent the network distance.

Sample application

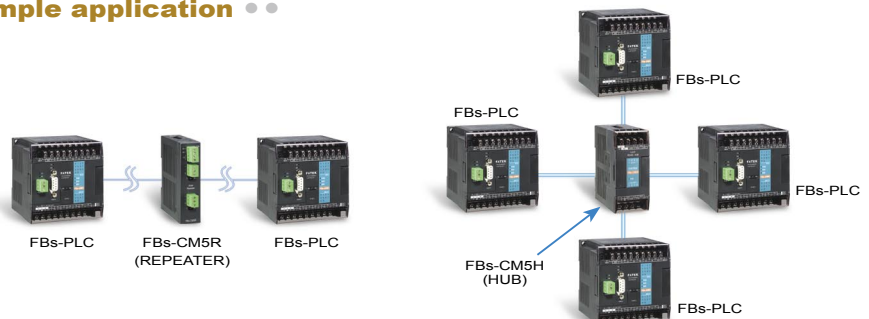

The RS485 REPEATER FBs-CM5R can be used to extend the distance and expand the range of RS485 network


Star connection of RS485 can be realized by using FBs-CM5H (HUB) to meet the requirement of special topological routing.

■ High-speed counter (HSC)

A FBs-PLC can have up to 8 sets of 32bits high-speed counter. Among which, 4 sets are hardware high-speed counter (HHSC) whose counting frequency can reach 120KHz (MC) or 920KHz (MN) and can operate with 8 counting modes. The other 4 sets are software high-speed counter (SHSC) whose total input frequency can reach 10KHz and can operate with three counting modes. The high-speed counters can be used in the applications required high-speed processing and precision control.

Counting (MODE)			HHSC (HSC0 ~ 3)	SHSC (HSC4 ~ 7)	Operation Waveform	
					Up count (+1)	Down count (-1)
Up/Down pulse	MD 0	U/D	O	O	U D	
	MD 1	U/Dx2	O		U D	
Pulse-Direction	MD 2	K/R	O	O	K R	
	MD 3	K/Rx2	O		K R	
A/B phase	MD 4	A/B	O	O	A B	
	MD 5	A/Bx2	O		A B	
	MD 6	A/Bx3	O		A B	
	MD 7	A/Bx4	O		A B	

Sample application ● The control of cutting machine with variable length

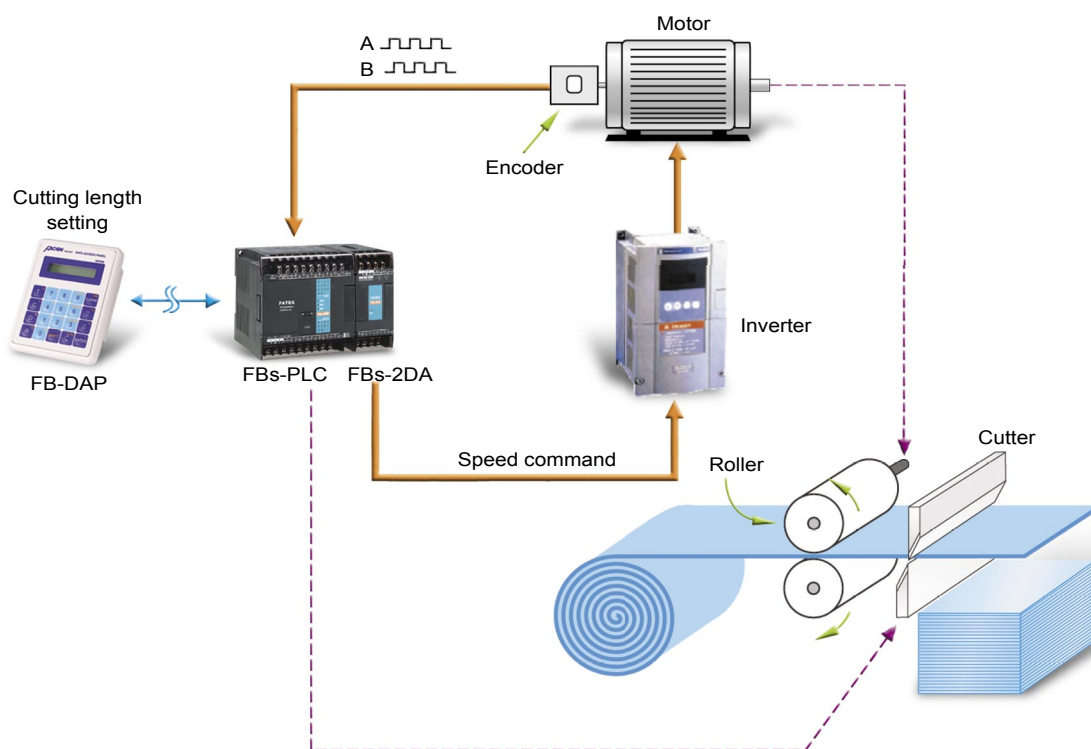


High-speed timer (HST) / NC position control

High-speed timer (HST)

The FBs-PLC has a special design 0.1mS time base high-speed timer that can provide a timer with 0.1mS resolution and real-time interrupt capability. Compared with other brands of PLC's in this class that have a resolution of just 1mS including error in scan time, the FBs-PLC is more than 10 times as precise. The FBs-PLC can easily handle precision timing or speed detection applications. The FBs-PLC has one 16-bit 0.1mS high-speed timer and 4 sets of 32-bit 0.1mS high-speed timer.


Sample application • • Combine HSC and HST to detect the break or blunting of drill.

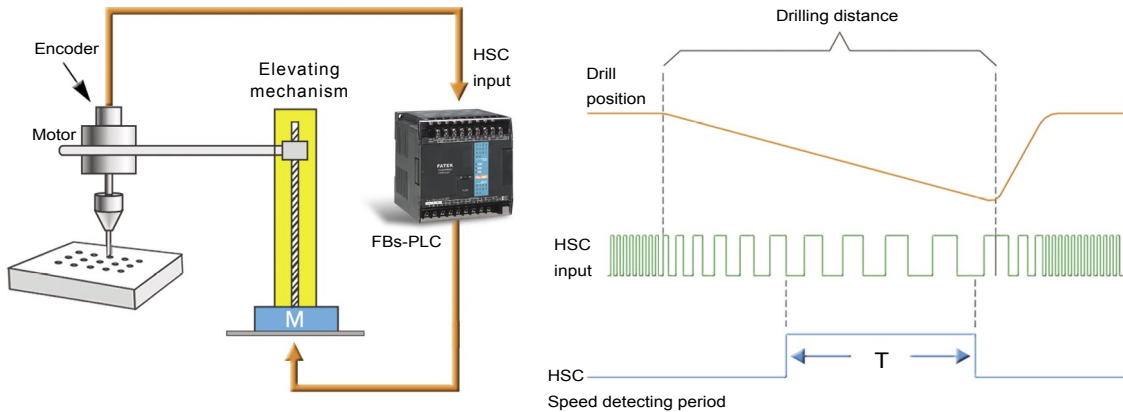

NC position control

The High-speed pulse output (HSPSO) of the FBs-PLC can perform up to 4 axes NC servo or stepping position control. With the accelerating and decelerating function, it is easy to achieve smooth and precise multi-zone position control. If coordinated with the built-in HHSC feedback, the FBs-PLC can perform closed loop control to compensate the wear, aging and unconformity of components. The FBs-PLC also provides a position control language, which when used with the convenient instruction in the ladder diagram, can facilitate the implementation of precise position control.

Sample application • • Use one PLC to perform 3 axes position control.

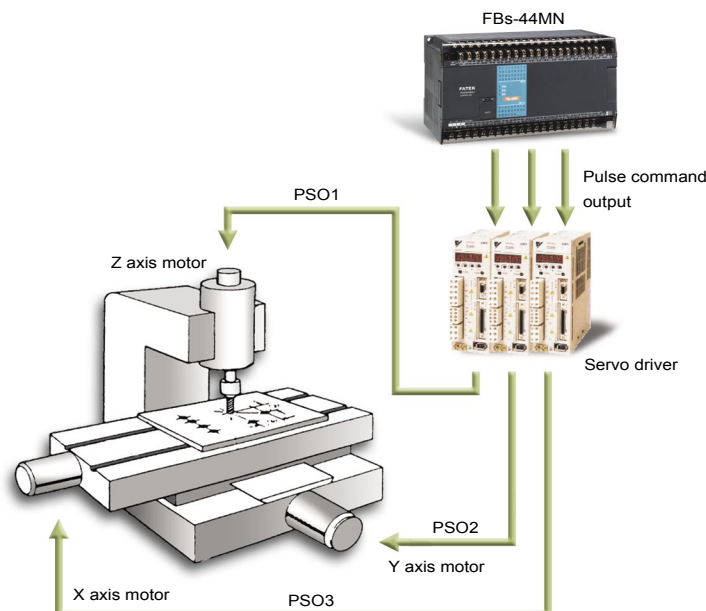


PSO2, PSO3 are used for X,Y table two dimensions position control. PSO1 is used for position control of drilling depth.

■ High-speed pulse width modulation (HSPWM)

The FBs-PLC provides 4 points hardware high-speed pulse width modulation output, with a resolution of 0.1% (for frequency 72Hz~18.432KHz) and 1% (for frequency 720Hz~184.32KHz), respectively. With high speed hardware, precision and stability, the FBs-PLC can easily achieve fine temperature control, proportional valve control, and simple yet practical low cost D/A outputs.

Sample application ●● Low-cost analog out and proportional value control

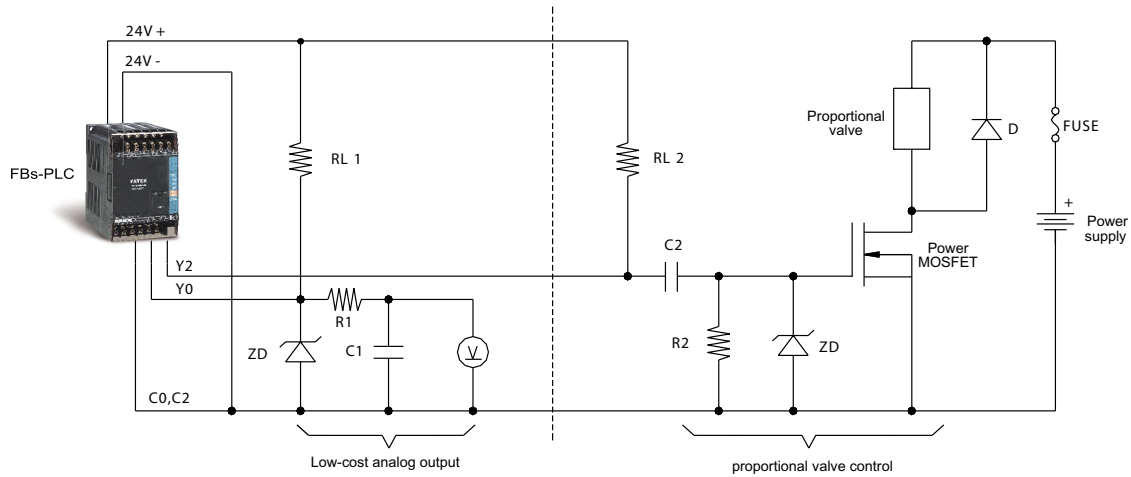


■ High-speed interrupt

An FBs-PLC can have up to 16 points of external interrupt inputs. The interrupt can be activated by the change of input status which can be positive edge/negative edge or both edges. When using the input interrupt function high speed operations can be detected on the input which would normally be missed on a normal I/O scan.

Sample application ●● Elevator position control

Incremental encoder can detect the position and the floor where the box of cage locating to do multiple sections of deceleration. Then, use photo sensor and stop plate to detect cage stop signal and issue a high-speed interrupt to immediate stop the cage precisely.

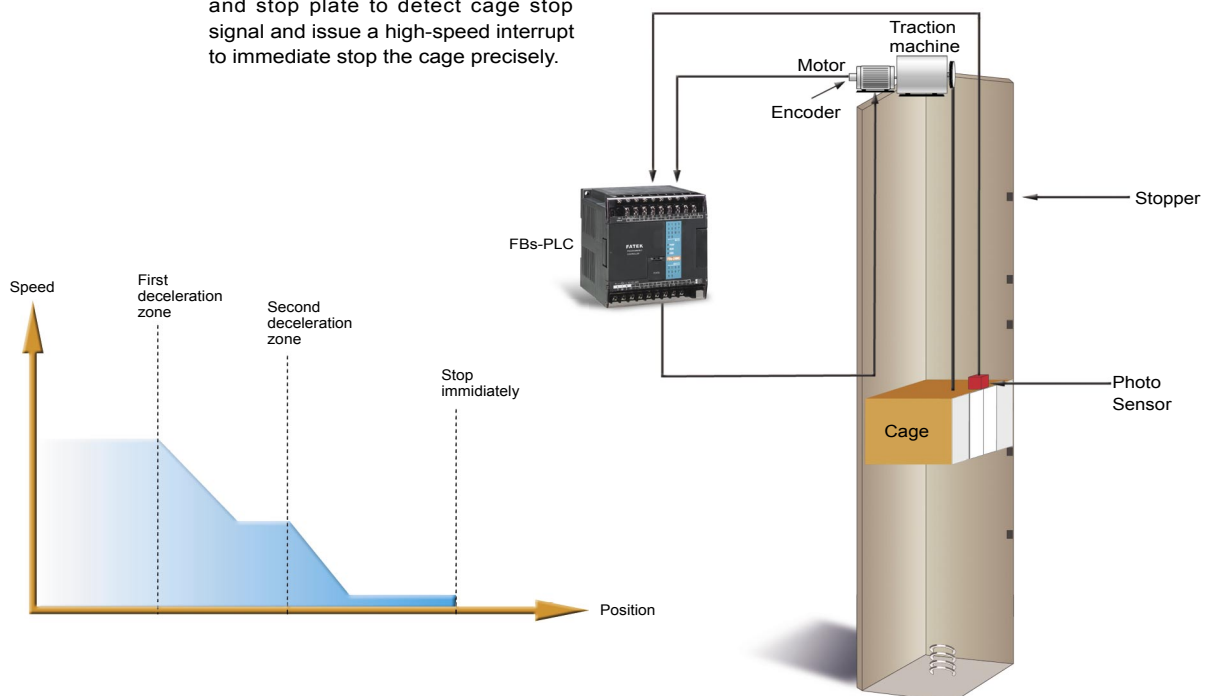


General purpose PID control / Temperature measurement and PID control

■ General purpose PID control

The FBs-PLC provides a general purpose PID control function which compares the process variables read from analog input (AI) with the preset values defined by the user. The FBs-PLC performs PID calculations according to the proportional band (P), integral constant (I) and derivative constant (D). An output control value is obtained from above execution and is controlled through the analog output (AO) to control process within the range specified by user. This feature can be applied for smooth precise control such as flow, pressure and level control.


Sample application • • Level control

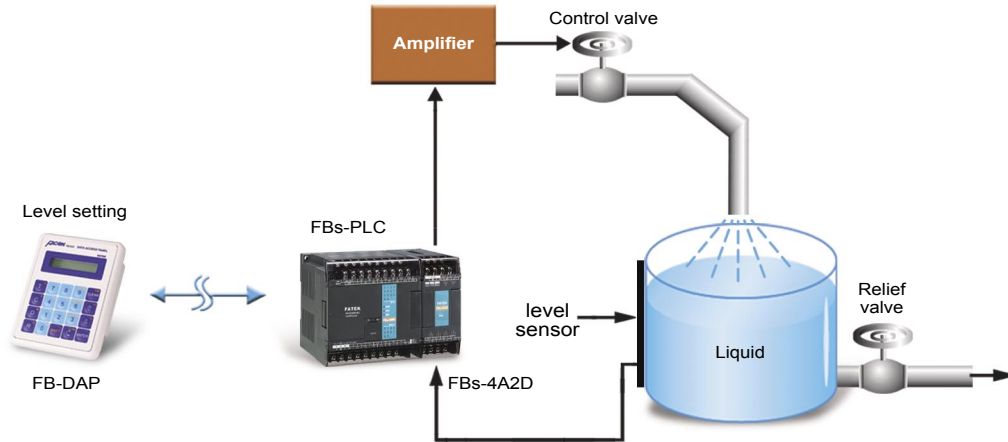

■ Temperature measurement and PID control


The FBs-PLC provides a thermocouple temperature modules (for J,K,R,S,E,T,B,N thermocouples) as well as a RTD temperature module (for Pt-100 and Pt-1000 RTD). Thermocouples are suitable for the measurement of large temperature ranges such as a boiler process. RTD's are good for the measurement of low temperature, smaller ranges of temperature and higher resolution such as refrigeration and air conditioning applications. Due to the characteristics of temperature control, adopting multiplexing scan measurement and multiple loop PID control make a single FBs-PLC capable of performing up to 32 loops of PID temperature control. With the convenient instruction of temperature measurement and temperature PID control in the ladder program development software significantly reduce the difficulty, cost and time of developing and testing monitoring and control programs.

Sample application • • Injection molding machine temperature control

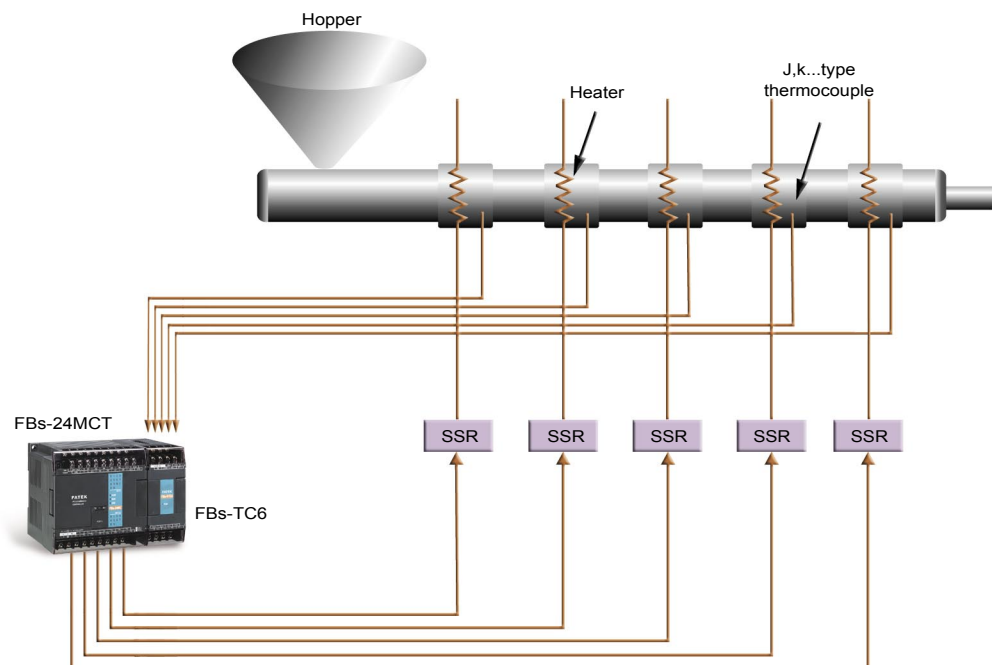


■ Thumbwheel switch multiplex input

The FBs-32DGI thumbwheel switch multiplex input module provided in FBs-PLC conduct multiplexing input scan of the eight sets of 4 digit numbers (or 128 independent ON/OFF status) via the embedded I/O ASIC chips (special chips for the FBs-PLC I/O module). It does not occupy any CPU time and the multiplexing scan rate is about 10ms. In addition, because only 24 wires are required by multiplexing input to achieve 32 digits (or 128bit ON/OFF) input, plus that the FBs-32DGI is only 4cm in width, it turn out to be an ultra high density, lowest cost, and most labor saving solution.

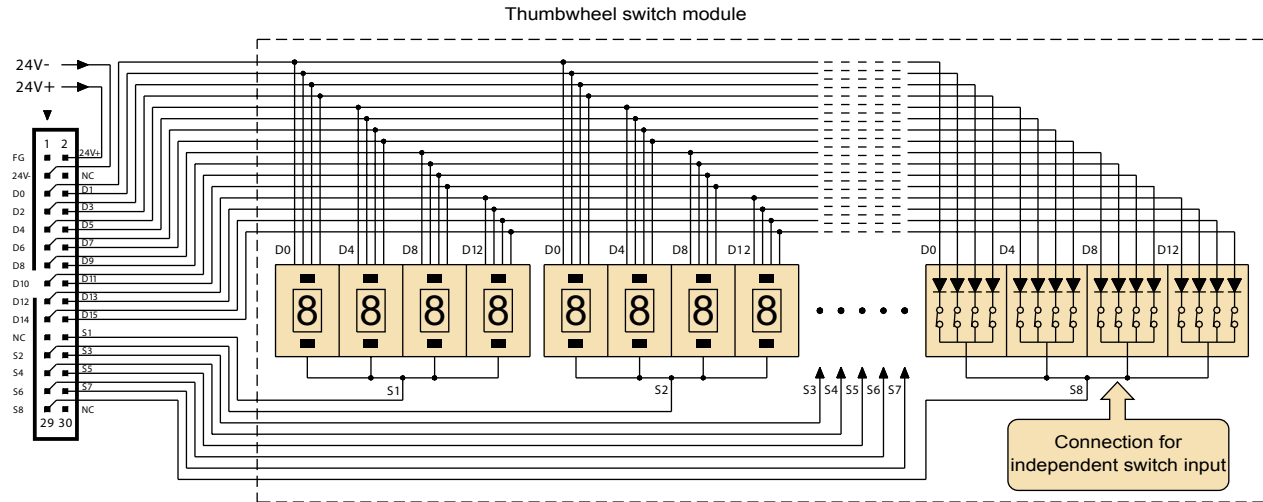

■ 7/16-segment LED display module

The FBs-7SG is a 7/16-segment LED display module with only 4cm width. The embedded I/O ASIC chips will automatically conduct the multiplexing scan display of two sets of 8 digits (a total of 16 digits) 7-segment LED display or 8 sets of 16-segment LED display without occupying CPU time. The multiplexing scan time is 10ms. Furthermore, because of multiplexing scan, each set of 8 digits (64bit LED) only requires the 16pins ribbon cables for connection. Three different driving voltages and three voltage fine tuning are available in this module, which are capable of driving most of existing 7-segment LED displays of which the driving voltage is various. The installation distance of display can even reach up to one hundred meters. FATEK also provides 4(.56", .8", 2.3", and 4.0") 7-segment LED display boards and 2(.8", 2.3") 16-segment alphanumeric LED display for the choice of users.

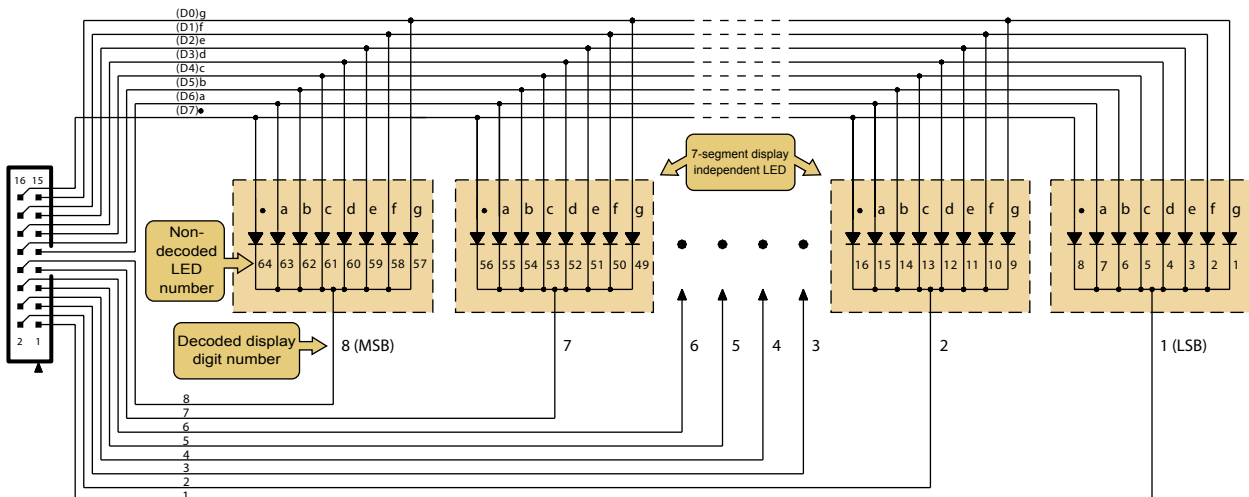


Simple human-machine interface and RFID card

■ Simple human-machine interface and RFID card

FB-DAP can be used for setting Timer/Counter and displaying NC position. It also can be used for simple human-machine interface by using the features of user definable key and display message. The FB-DAP with -R option is equipped with wireless card reader module and can be used for the application of entrance, elevator, security control and calling car in parking tower. Besides, FB-DAP uses extra-large membrane keypad, which is easy to be distinguished and operated.


Sample application ●● To set Timer/Counter and to display NC position

Use reference number (T, C, R) or document name (1~16 English characters or numbers) to specify monitoring object

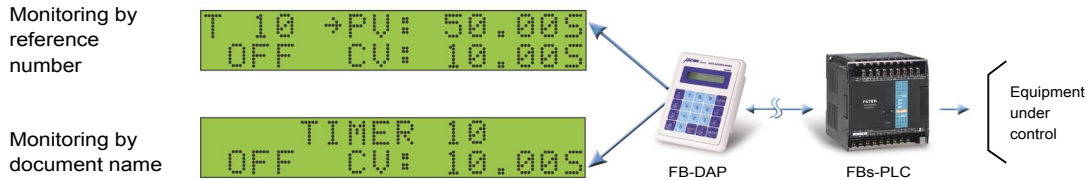


Sample application ●● Used as alarm or message display

This mode can be as dedicated mode or a background mode. In dedicated mode, FB-DAP is only for displaying. In background mode, FB-DAP works in pre-defined working mode (such as T/C setting and entrance control etc.) while in normal situation. FB-DAP will display alarm message (predefined in program) or display event message(the message can be changed by user without modifying the program) only when alarm or special event happens. The buzzer alarm is optional.

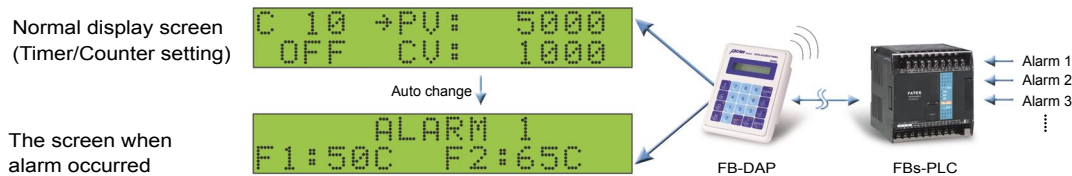

Can set 10 grades of alarm and event display message. When the length of event display message exceeds 16 characters, FB-DAP will display the message with slow scroll.

Sample application ●● The application of entrance and parking control with multi-DAP link and RFID card

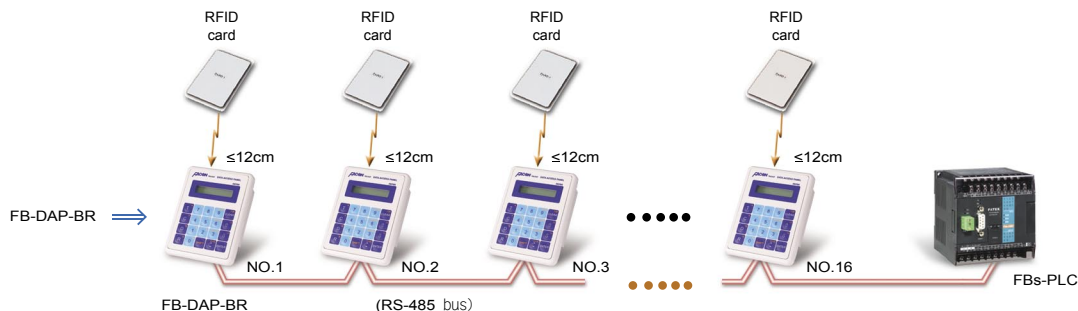

One FBs-PLC can connect up to 16 FB-DAPs. If the number of FB-DAP is exceeded, can use the CPU-LINK for expansion. With one PLC, can support 16 FB-DAPs. Maximum number of linked DAP station is 254x16

Sequential instructions

Instruction	Operand	Ladder symbol	Function
ORG	X,Y,M, S,T,C		Network starts by an A contact
ORG NOT			Network starts by a B contact
ORG TU			Network starts by a TU contact
ORG TD			Network starts by a TD contact
ORG OPEN			Network starts by an open contact
ORG SHORT			Network starts by a short contact
LD	X,Y,M, S,T,C		Branch line starts by an A contact
LD NOT			Branch line starts by a B contact
LD TU			Branch line starts by a TU contact
LD TD			Branch line starts by a TD contact
LD OPEN			Branch line starts by an open contact
LD SHORT			Branch line starts by a short contact
AND	X,Y,M, S,T,C		Serial connect with an A contact
AND NOT			Serial connect with a B contact
AND TU			Serial connect with a TU contact
AND TD			Serial connect with a TD contact
AND OPEN			Serial connect with an open contact
AND SHORT			Serial connect with a short contact

Instruction	Operand	Ladder symbol	Function
OR	X,Y,M, S,T,C		Parallel connect with an A contact
OR NOT			Parallel connect with a B contact
OR TU			Parallel connect with a TU contact
OR TD			Parallel connect with a TD contact
OR OPEN			Parallel connect with an open contact
OR SHORT			Parallel connect with a short contact
ANDLD			Concatenate two blocks in series
ORLD			Merge two blocks in parallel
OUT	Y,M,S		Output result to coil
OUT NOT			Output the inverse of result to a coil
OUT L	Y		Output result to a retentive coil
OUT	TR		Store node status in temporary relay
LD			Retrieve node status from temporary relay
TU			Take differential up of node status to node status
TD			Take differential down of node status to node status
NOT			Inverse node status
SET			Set a coil
RST			Reset a coil

Step ladder instructions (SFC)

Instruction	Operand	Ladder symbol	Function
STP	Snnn		Define STEP program
STPEND			STEP program end

Instruction	Operand	Ladder symbol	Function
TO	Snnn		STEP divergence
FROM			STEP convergence

Function instructions

Category	NO.	Instruction	Derivative	Function
Timer		Tnnn		General timer instruction (T0 ~ T255)
Counter		Cnnn		General counter instruction (C0 ~ C255)
Setting / Resetting	7	UDCTR	D	16 or 32-bit up/down counter
		SET	DP	Set all bits of register or a discrete point to 1
		RST	DP	Clear all bits of register or a discrete point to 0
Digital operation	114	Z-WR	P	Zone set or clear
	4	DIFU		Take differential up of the node status to operand
	5	DIFD		Take differential down of the node status to operand
Mathematical operation	10	TOGG		Toggle the coil status
	11	(+)	DP	Sa+Sb → D
	12	(-)	DP	Sa-Sb → D
	13	(*)	DP	Sa × Sb → D
	14	(/)	DP	Sa / Sb → D
	15	(+1)	DP	Add 1 to D
	16	(-1)	DP	Subtract 1 from D
	23	DIV48	P	48 bits integer division Sa / Sb → D
	24	SUM	DP	Sum of N consecutive values
	25	MEAN	DP	Average of N consecutive values
	26	SQRT	DP	Square root of S
	27	NEG	DP	Two's complement of D (Negative number)
	28	ABS	DP	Absolute value of D
	29	EXT	P	Extend 16 bits into 32 bits

Category	NO.	Instruction	Derivative	Function
Mathematical operation	30	PID	P	PID calculation
	31	CRC16	P	CRC16 calculation
	32	ADCNV		Offset and full scale conversion for analog I/O
	200	I→F	DP	Integer to floating point number conversion
	201	F→I	DP	Floating point number to integer conversion
	202	FADD	P	Addition of floating point number
	203	FSUB	P	Subtraction of floating point number
	204	FMUL	P	Multiplication of floating point number
	205	FDIV	P	Division of floating point number
	206	FCMP	P	Comparison of floating point number
	207	FZCP	P	Zone comparison of floating point number
	208	FSQR	P	Square root of floating point number
	209	FSIN	P	SIN trigonometric function
	210	FCOS	P	COS trigonometric function
	211	FTAN	P	TAN trigonometric function
Logic operation	212	FNEG	P	Change sign of floating point number
	213	FABS	P	Absolute value of floating point number
	18	AND	DP	Sa AND Sb
	19	OR	DP	Sa OR Sb
	35	XOR	DP	Sa XOR Sb
Comparison	36	XNR	DP	Sa XNR Sb
	17	CMP	DP	Value Compare
	37	ZNCMP	DP	Zone Compare

Function instructions

(Continues)

Category	NO.	Instruction	Derivative	Function
Move operation	8	MOV	DP	Move S to D
	9	MOV/	DP	Inverse S and move to D
	40	BITRD	DP	Move the Bit-N of S to FO
	41	BITWR	DP	Write INB input to the Bit-N of D
	42	BITMV	DP	Move the Bit-Ns of S to the Bit -Nd of D
	43	NBMV	DP	Move the Nibble-Ns of S to the Nibble-Nd of D
	44	BYMV	DP	Move the Byte-Ns of S to the Byte-Nd of D
	45	XCHG	DP	Exchange Da and Db
	46	SWAP	P	Swap the High-Byte of D with the Low-Byte of D
	47	UNIT	P	Take Nb0 of N words to form a Word
	48	DIST	P	Distribute N Nb of S to Nb0 of N Words
	49	BUNIT	P	Low byte of words re-unit
	50	BDIST	P	Words split into multi-byte
	160	RW-FR	DP	File register access
Shift / Rotation	6	BSHF	DP	Shift D right 1 bit or left 1 bit
	51	SHFL	DP	Shift D left N bits
	52	SHFR	DP	Shift D right N bits
	53	ROTL	DP	Rotate D left N bits
	54	ROTR	DP	Rotate D right N bits
Code conversion	20	→BCD	DP	Convert S into BCD
	21	→BIN	DP	Convert S into Binary
	55	B→G	DP	Binary to Gray code conversion
	56	G→B	DP	Gray code to Binary conversion
	57	DECOD	P	Decode the Ns ~ Nl. of S
	58	ENCOD	P	Encode the Ns ~ Nl. of S
	59	→7SG	P	Convert N+1' Nb of S into 7-segment code
	60	→ASC	P	Convert character/number into ASCII code
	61	→SEC	P	Represent hour, minute, second by seconds
	62	→HMS	P	Represent second by hour, minute and second
	63	→HEX	P	Convert ASCII code into hexadecimal
	64	→ASCII	P	Convert hexadecimal into ASCII code
Flow control	0	MC		Master control loop start
	1	MCE		Master control loop end
	2	SKP		The start of the skip loop
	3	SKPE		The end of the skip loop
		END		Terminate the execution of program (for debugging)
	22	BREAK	P	Exit from FOR-NEXT loop
	65	LBL		Define the string as label
	66	JMP	P	Jump instruction
	67	CALL	P	Call instruction
	68	RTS		Subroutine return instruction
	69	RTI		Interrupt return instruction
	70	FOR		The start of the FOR loop program
	71	NEXT		Return point of FOR loop
I/O instruction	74	IMDIO	P	Refresh I/O immediately
	76	TKEY	D	10 keys input convenient instruction
	77	HKEY	D	16 keys input convenient instruction
	78	DSW	D	Thumbwheel switch input convenient instruction
	79	7SGDL	D	7-segment multiplexing display convenient instruction

Category	NO.	Instruction	Derivative	Function
I/O instruction	80	MUXI		Multiplexing input convenient instruction
	81	PLSO	D	Pulse output(PSO) instruction
	82	PWM		Pulse width modulation output (PWM) instruction
	83	SPD		Speed detection instruction
	84	TDSP		7/16-segment LED display control
	86	TPCTL		PID temperature control
	139	HSPWM		Hardware PWM pulse output
Cumulative Timer	87	T.01S		0.01S time base cumulative timer
	88	T.1S		0.1S time base cumulative timer
	89	T1S		1S time base cumulative timer
Monitor and control	90	WDT	P	Set watchdog timer
	91	RSWDT	P	Reset watchdog timer
HSC/ HST	92	HSCTR		Read CV of hardware high speed counter/timer
	93	HSCTW		Write CV or PV of hardware high speed counter/timer
Text	94	ASCWR		Output ASCII message
Ascend/ Descend	95	RAMP		Ascending/Descending convenient instruction
Communication	150	M-BUS		Modbus protocol communication
	151	CLINK		Fatek/Generic protocol communication
Table operation	100	R→T	DP	Move register Rs to the table Td
	101	T→R	DP	Move the Rp of table Ts to register Rd
	102	T→T	DP	Move the Rp of table Ts to the Rp of table Td
	103	BT_M	DP	Move table Ts to table Td
	104	T_SWP	DP	Swap Ta and Tb
	105	R-T_S	DP	Search Rs from table Ts
	106	T-T_C	DP	Compare table Ta and table Tb
	107	T_FIL	DP	Fill Rs into Td table
	108	T_SHF	DP	Shift table left or right
	109	T_ROT	DP	Rotate table left or right
	110	QUEUE	DP	First in first out (Queue) instruction
	111	STACK	DP	First in last out (Stack) instruction
	112	BKCMP	DP	Compare Rs with zone defined by two tables
	113	SORT	DP	Sort the table
Matrix operation	120	MAND	P	AND two matrixes
	121	MOR	P	OR two matrixes
	122	MXOR	P	XOR two matrixes
	123	MXNR	P	XNR two matrixes
	124	MINV	P	Inverse matrix
	125	MCMP	P	Compare two matrixes and find out the differences between two matrixes
	126	MBRD	P	Read the bit of a matrix pointed by pointer
	127	MBWR	P	Write the bit of a matrix pointed by pointer
	128	MBSHF	P	Shift matrix left 1 bit or right 1 bit
	129	MBROT	P	Rotate matrix left 1 bit or right 1 bit
	130	MBCNT	P	Count the number of bit whose value is 1 in matrix
NC Position control	140	HSPSO		Hardware NC pulse output
	141	MPARA		Set NC position parameters
	142	PSOFF	P	Force to stop HSPSO
Interrupt control	143	PSCNV	P	Convert pulse count into mechanical value for display
	145	EN	P	Enable external input or peripheral interrupt/operation
	146	DIS	P	Disable external input or peripheral interrupt/operation

■ Environmental specifications

Item			Specification	Note
Operating ambient temperature	Enclosure space	Minimum	5°C	Permanent installation
		Maximum	40°C	
	Open space	Minimum	5°C	
		Maximum	55°C	
Storage temperature			-25°C ~ +70°C	
Relative humidity(non-condensing, RH-2)			5% ~ 95%	
Pollution resistance			Degree II	
Corrosion resistance			Base on IEC-68 standard	
Altitude			≤2000m	
Vibration resistance	Fixed by DIN RAIL		0.5G, 2 hours for each direction of 3 axes	
	Fasten by screw		2G, 2 hours for each direction of 3 axes	
Shock resistance			10G, Three times for each direction of 3 axes	
Noise resistance			1500 Vp-p, pulse width 1μS	
Withstand voltage			1500VAC, 1 minute	L、N to any terminal

■ Power supply specifications

● AC power supply

Specification		10/14 points main unit	20/24 points main unit	32/40 points main unit	60 points main unit
Input range	voltage	100 ~ 240VAC -15%/+10%			
	Frequency	50/60Hz ±5%			
Max. power consumption (built-in power supply)		21W (POW-14)	36W (POW-24)		
Inrush current		20A @ 264VAC			
Allowable power mometary interruption time		<20mS			
Fuse rating		1A, 250VAC			

● DC power supply

Item	Specification	10/14 points main unit	20/24 points main unit	32/40 points main unit	60 points main unit
Input range		24VDC -15%/+20%			
Max. power consumption (built-in power supply)		15W (DPOW-10)	24W (DPOW-16)		
Inrush current		20A @ DC24 V			
Allowable power mometary interruption time		<20mS			
Fuse rating		3.15A, 250VAC			

■ Main unit specifications

* is default,user configurable

Item		Specification	Note
Execution speed		0.33uS/Sequential instruction in average	
Program capacity		20K Words	
Program memory		FLASH ROM or SRAM + Lithium battery for Back-up	
Sequential instruction		36 instructions	
Function instruction		326 instructions (126 kinds)	Include derivative instructions
Flow chart command (SFC)		4 instructions	
Communication Interface	Port0 (RS232 or USB)	Communication speed 4.8Kbps ~ 921.6Kbps (9.6Kbps)*	
	Port1 ~ Port4 (RS232, RS485 or Ethernet)	Communication speed 4.8Kbps ~ 921.6Kbps (9.6Kbps)*	Port1 ~ 4 provide FATEK or Modbus master/slave communication protocol
	Maximum link stations	254	

Main unit specifications

(Continue)

* is default, user configurable


Item				Specification				Note
Digital (Bit status)	X	Input contact (DI)		X0 ~ X255 (256)				Corresponding to external digital input
	Y	Output relay (DO)		Y0 ~ Y255 (256)				Corresponding to external digital output
	TR	Temporary relay		TR0 ~ TR39 (40)				
	M	Internal relay	Non-retentive	M0 ~ M799 (800)* M1400 ~ M1911 (512)				Can be configured as retentive type
			Retentive	M800 ~ M1399 (600)*				Can be configured as non-retentive type
		Special relay		M1912 ~ M2001 (90)				
	S	Step relay	Non-retentive	S0 ~ S499 (500)*				S20 ~ S499 can be configured as retentive type
			Retentive	S500 ~ S999 (500)*				Can be configured as non-retentive type
T	Timer “Time Up” status contact		T0 ~ T255 (256)					
C	Counter “Count Up” status contact		C0 ~ C255 (256)					
Register (Word data)	TMR	Timer current value register	0.01S Time base		T0 ~ T49 (50)*			T0 ~ T255 numbers for each time base can be adjusted.
			0.1S Time base		T50 ~ T199 (150)*			
			1S Time base		T200 ~ T255 (56)*			
	CTR	Counter current value register	16-bit	Retentive	C0 ~ C139 (140)*			Can be configured as non-retentive type
				Non-retentive	C140 ~ C199 (60)*			Can be configured as retentive type
			32-bit	Retentive	C200 ~ C239 (40)*			Can be configured as non-retentive type
				Non-retentive	C240 ~ C255 (16)*			Can be configured as retentive type
	HR DR	Data register	Retentive		R0 ~ R2999 (3000)* D0 ~ D3999 (4000)			Can be configured as non-retentive type
			Non-retentive		R3000 ~ R3839 (840)*			Can be configured as retentive type
	HR ROR		Retentive		R5000 ~ R8071 (3072)*			When not configured as ROR,it can serve normal register (for read/write)
			Read only register		R5000 ~ R8071can be set as ROR ~ default setting is (0)*			ROR is stored in special ROR area and not consume program space
		File register		F0 ~ F8191 (8192)			Must save/retrieved via special commands	
		IR	Input register		R3840 ~ R3903 (64)			Corresponding to external numeric input
	OR	Output register		R3904 ~ R3967 (64)			Corresponding to external numeric output	
	SR	Special system register		R3968 ~ R4167 (197), R4000 ~ R4095 (96)			Except R4152 ~ R4154	
		0.1mS high-speed timer register		R4152 ~ R4154 (3)				
		High-speed Counter register	Hardware (4 sets)		DR4096 ~ DR4110 (4x4)			
Software (4 sets)			DR4112 ~ DR4126 (4x4)					
Calendar register		R4128 (sec)		R4129 (min)	R4130 (hour)	R4131 (day)	Not available in MA model	
		R4132 (month)		R4133 (year)	R4134 (week)			
XR	Index register		V, Z (2), P0 ~ P9 (10)					
Interrupt control		External interrupt control		32 interrupts (16 points input positive/negative edge)				
		Internal interrupt control		8 interrupts (1, 2, 3, 4, 5, 10, 50, 100mS)				
0.1mS high speed timer(HST)				1 (16 bits), 4 (32 bits, share with HHSC)				
High-speed counter (HSC)	Hardware high-speed counter (HHSC) /32bits		No. of channel		Up to 4			Total number of HHSC and SHSC is 8 HHSC can be converted into 32 bits/0.1mS time base high-speed timer (HST)
			Counting mode		8 modes (U/D, U/Dx2, K/R, K/Rx2, A/B, A/Bx2, A/Bx3, A/Bx4)			
			Counting frequency		Maximum is 120KHz (Single end input) or 920KHz (differential input)			
	Software high-speed counter (HHSC) /32bits		No. of channel		Up to 4			
			Counting mode		3 modes (U/D, K/R, A/B)			
Counting frequency			Maximum sum up to 10KHz					
NC position pulse out (HSPSO)		Number of axis		Up to 4				
		Output frequency		Maximum is 120KHz (Single end output) or 920KHz (differential output)			Half of the maximum while A/B output	
		Pulse out mode		3 modes (U/D,K/R,A/B)				
		Programming method		Dedicated position language				
		Interpolation		Maximum 4 axes linear interpolation				
HSPWM output		Number of points		Up to 4				
		Output frequency		72Hz ~ 18.432KHz (with 0.1% resolution) 720Hz ~ 184.32KHz (with 1% resolution)				
Captured input			Points		Up to 36			
			Pulse width		>10 μS (High speed)			
					>47 μS (Medium speed)			
					>470 μS (Medium low speed)			
Digital filter			X0 ~ X15		Adjustable filtering frequency 14KHz ~ 1.8MHz Adjustable time constant 0 ~ 1.5mS/0~15mS (In 0.1mS/1mS)			Chosen by frequency at high frequency Chosen by time constant at low frequency
			X16 ~ X35		Time constant 1mS ~ 15mS, adjustable by step of 1mS			

Digital input (DI) specifications


Specification Item		5VDC differential input	24VDC single-end input				Note
		Ultra high speed 920KHz	High speed 120KHz	Medium speed (HSC) 20KHz ^{*1}	Medium low Speed (Captured) 470μS ^{*2}	Low speed 4.7mS	
Input signal voltage		5VDC ± 10%	24VDC ± 10%				<div>^{*1} Limit of input speed in MA model is 10KHz</div> <div>^{*2} For captured inputs</div>
Threshold current	ON	> 6mA	> 4mA			> 2.3mA	
	OFF	< 2mA	< 1.5mA			< 0.9mA	
Maximum input current		20mA	7mA			4.2mA	
Input indication		Displayed by LED: Lit when "ON", dark when "OFF"					
Isolation method		Photocouple isolation					
SINK/SRCE wiring		Independent wiring	Via variation of internal common terminal S/S and external common wiring				
Noise filtering methods		DHF (0nS ~ 15mS) +AHF (470nS)		DHF (0nS ~ 15mS) + AHF (470μS)		AHF (4.7mS)	DHF: Digital hardware filter AHF: Analog hardware filter

Note: In this catalog, All the In/Out type of "Source" is denoted by its abbreviation - "SRCE"


- Wiring of 5VDC differential input (with frequency up to 920KHz for high speed or high noise environments)

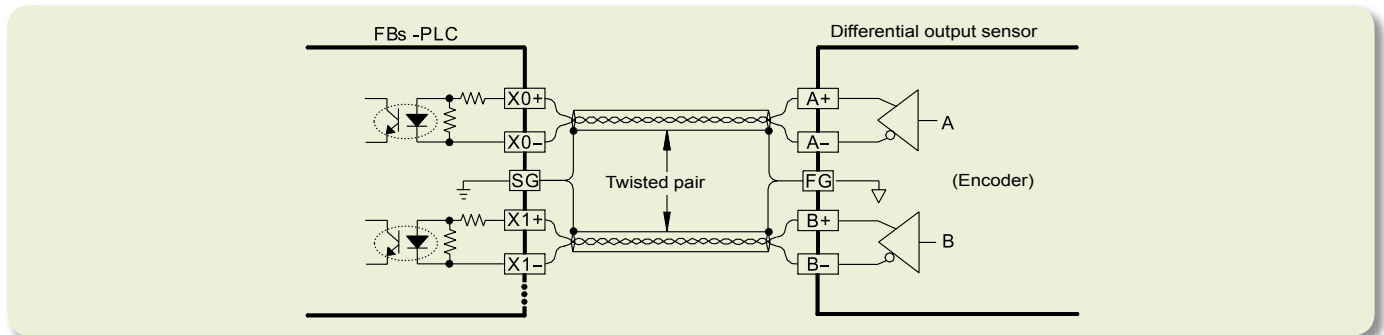


- Wiring of 5VDC differential input to 5VDC single-end SINK /SRCE input (Max. 120KHz)

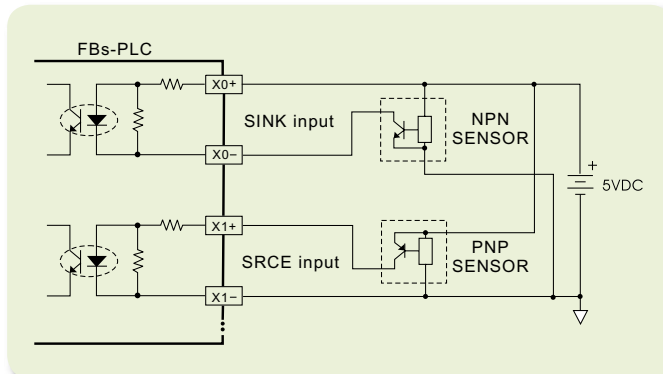


- Wiring of 5VDC differential input to 24VDC single-end SINK /SRCE input (Max. 120KHz)

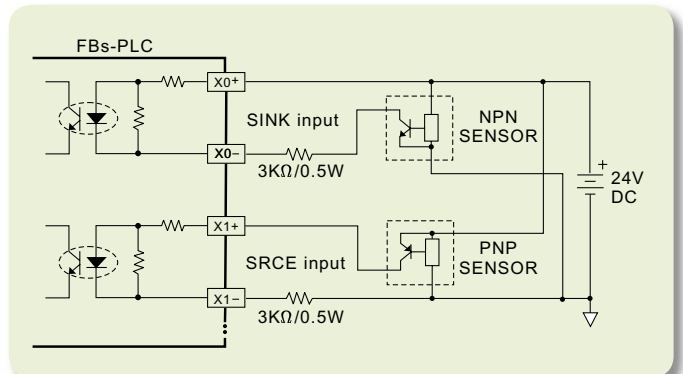

- Wiring of 24VDC single-end SINK input

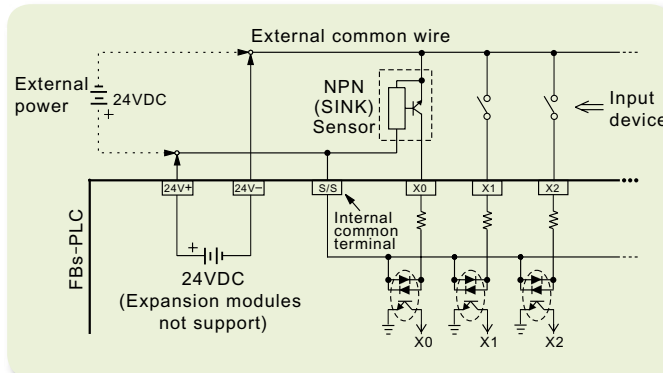

- Wiring of 24VDC single-end SRCE input

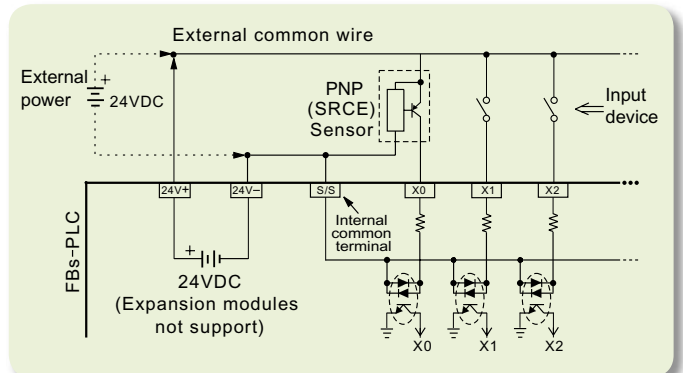


Digital output (DO) specifications

Digital output (DO) specifications


Specification		Differential output	Single-end transistor output			Single-end relay output	Single-end TRIAC output
		Ultra high speed	High speed	Medium speed	Low speed		
Maximum swithcing (working) frequency		920KHz*	120KHz*	20KHz*	200Hz	For ON/OFF, not suitable for switching frequently	
Working voltage		5VDC±10%	5 ~ 30 VDC			< 250VAC, 30VDC	100 ~ 240VAC
Maximum load current	Resistive	50mA	0.5A	0.2A	0.5A 0.1A (24EYT)	2A/single, 4 A/common	1A
	Inductive					80VA	15VA/100VAC 30VA/200VAC
Maximum voltage drop (@ maximum load)		-	0.6V	2.2V	1.2V	0.06V (initial)	1.2Vrms
Minimum load		-	-			2mA/DC power	25mA
Leakage current		-	< 0.1mA/30VDC			-	2mA
Maximum output delay time	ON → OFF	200nS	200nS	15μS	1mS	10mS	1mS
	OFF → ON			30μS			1/2AC cycle
Output status indication		Displayed by LED: Lit when "ON", dark when "OFF"					
Over current protection		N/A					
Isolation type		Photocouple isolation			Electromagnetic isolation		Photocouple isolation
SINK/SRCE output type		Independent dual terminals for arbitrary connection	Choose SINK/SRCE by models and non-exchangeable			Bilateral device, can be arbitrarily set to SINK/SRCE output	

* : Half of the maximum while A/B output


- Wiring of 5VDC differential output (Up to 920KHz for U/D/CK output; Up to 460KHz for A/B output; For high speed or high noise environments)

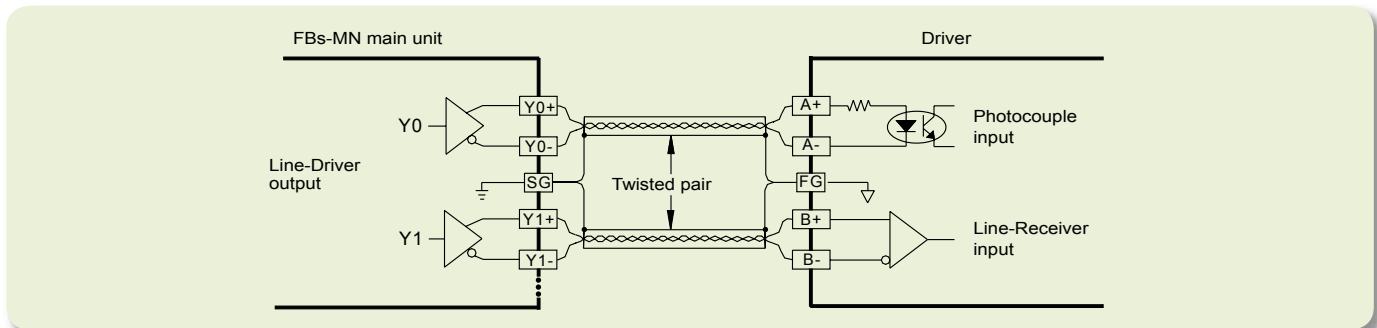


- Wiring of transistor single-end SINK output

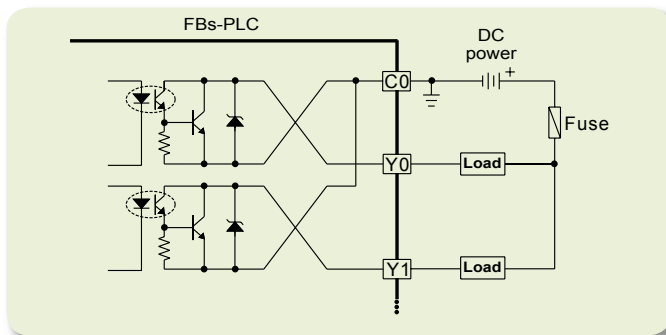


- Wiring of transistor single-end SRCE output

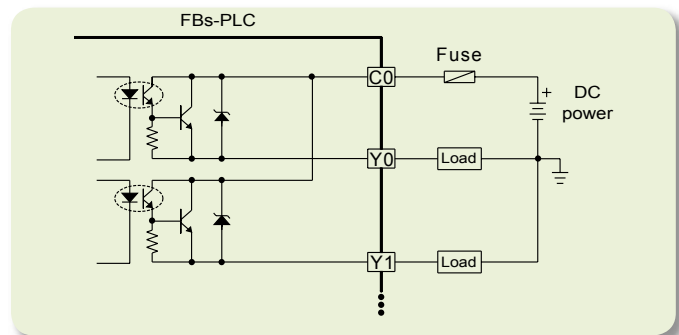

- Wiring of relay single-end output

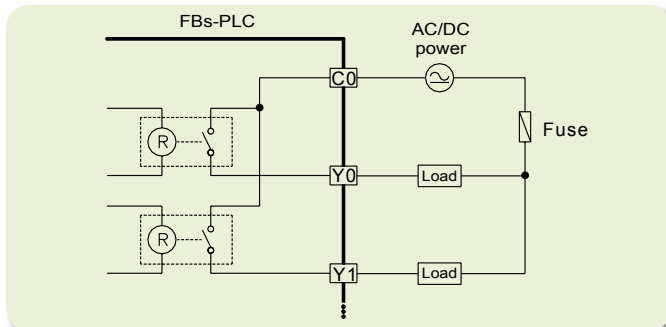

- Wiring of Thyristor single-end output

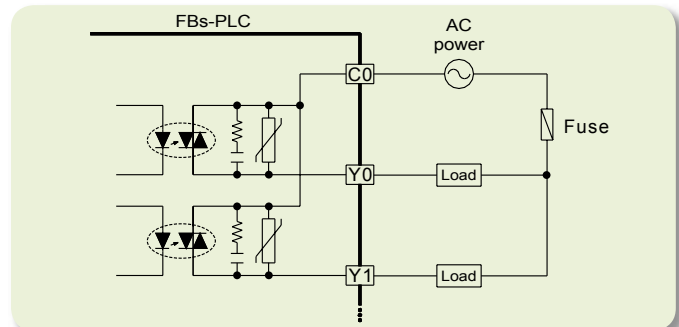

NC positioning main units (MN)

(7.62 mm detachable terminal block)



FBs-20MN(T,S)



FBs-32MN(T,S)



FBs-44MN(T,S)

Specification Model number	Calendar	Comm. port		Digital input			Digital output					Dimension		
		Built-in	Expansible	5VDC		24VDC		5VDC		Transistor (5 ~ 30VDC)			Relay	Thyristor
				Ultra high-speed (HSC) 920KHz	Medium speed (HSC) 20KHz	Medium low speed (Cap.) 470μS	differential ultra high-speed 920KHz	Medium speed 20KHz (0.2A)	Low speed 200Hz (0.5A)	AC/DC (2A)	AC (1A)			
FBs-20MN △-⊙	Built-in	1 port (Port1 ~ 4, RS485 or RS232 or Ethernet)	4 ports (Port1 ~ 4, RS485 or RS232 or Ethernet)	2 points (1 axis)	10 points		2 points (1axis)		6 points		6 points		Figure 1	
FBs-20MNT ◇△-⊙														
FBs-20MNS △-⊙														
FBs-32MN △-⊙				4 points (2 axes)	12 points	4 points	4 points (2 axes)	4 points	4 points	4 points		8 points		Figure 1
FBs-32MNT ◇△-⊙														
FBs-32MNS △-⊙														
FBS-44MN △-⊙				8 points (4 axes)	8 points	12 points	8 points (4 axes)		8 points		8 points		8 points	Figure 1
FBs-44MNT ◇△-⊙														
FBs-44MNS △-⊙														

△ : Port0 interface: Blank—RS232, U—USB

◇ : Transistor output type: Blank—SINK output (NPN), J—SRCE output (PNP)

⊙ : Power supply: Blank—AC power supply (100 ~ 240VAC), D—DC power supply (24VDC)

High-performance main units (MC)

(7.62 mm detachable terminal block)



FBs-10MC(T,S)



FBs-14MC(T,S)



FBs-20MC(T,S)



FBs-24MC(T,S)



FBs-32MC(T,S)



FBs-40MC(T,S)



FBs-60MC(T,S)

Specification Model number		Calendar	Comm. port	Digital input			Digital output					Dimension			
			Built-in	Expansible	24VDC			Transistor (5 ~ 30VDC)			Relay		Thyristor		
					High speed (HSC) 120KHz	Medium speed (HSC) 20KHz	Medium low speed (Cap.) 470μS	High speed 120KHz (0.5A)	Medium speed 20KHz (0.2A)	Low speed 200Hz (0.5A)	AC/DC (2A)		AC (1A)		
FBs-10MC △-⊙-X		Built-in	1 port (Port0, USB or RS232)	4 points (Port1 ~ 4, RS485 or RS232 or Ethernet)	2*~4 points					4 points		Figure 2			
FBs-10MCT ◇△-⊙-XY						4 points	2*~4 points	2 points							
FBs-10MCS △-⊙-X													4 points		
FBs-14MC △-⊙-X											6 points				
FBs-14MCT △-⊙-XY					6 points	2*~6 points	4 points								
FBs-14MCS △-⊙-X										6 points					
FBs-20MC △-⊙-X					2*~6 points	10 points	2*~8 points	6 points		8 points					
FBs-20MCT ◇△-⊙-XY										8 points					
FBs-20MCS △-⊙-X					12 points		2*~8 points	6 points	2 points	10 points					
FBs-24MC △-⊙-X										10 points					
FBs-24MCT ◇△-⊙-XY											10 points				
FBs-24MCS △-⊙-X										12 points					
FBs-32MC △-⊙-X					2*~8 points	14 points	4 points	2*~8 points	6 points	4 points			Figure 1		
FBs-32MCT ◇△-⊙-XY												12 points			
FBs-32MCS △-⊙-X												16 points			
FBs-40MC △-⊙-X							8 points	2*~8 points	6 points	8 points		16 points			
FBs-40MCT ◇△-⊙-XY					20 points					24 points			Figure 1		
FBs-40MCS △-⊙-X												24 points			
FBs-60MC △-⊙-X														24 points	
FBs-60MCT ◇△-⊙-XY															
FBs-60MCS △-⊙-X															

△ : Port0 interface : Blank—RS232, U—USB

◇ : Transistor output type: Blank—SINK output (NPN), J—SRCE output (PNP)

⊙ : Power supply: Blank—AC power supply (100 ~ 240VAC), D—DC power supply (24VDC)

X: Expanded high-speed input (120KHz) points

Y: Expanded high-speed output (120KHz) points

* : The standard MC main units have equipped with 2 points of high-speed input and 2 points of high-speed output. For optional order, there are 1 ~ 6 points more high-speed input (specified by "X") and high-speed output (specified by "Y") can be expanded. For example, FBs-40MCT-25 means expanding 2 points of high-speed input (total 4 points) and 5 points of high-speed output (total 7 points). And FBs-24MCT-03 means only expanding 3 points of high-speed output (total 5 points).

Economical main units (MA) / Digital expansion units

■ Economical main units (MA)

(7.62 mm terminal block)



FBs-10MA(T,S)



FBs-14MA(T,S)



FBs-20MA(T,S)



FBs-24MA(T,S)



FBs-32MA(T,S)



FBs-40MA(T,S)



FBs-60MA(T,S)

Specification Model number	Calendar	Comm. port		Digital input		Digital output				Dimension
		Built-in	Expandable	24VDC		Transistor (5 ~ 30VDC)		Relay	Thyristor	
				Medium Speed (HSC) 10KHz	Medium low (Cap.) 470μs	Medium speed 10KHz (0.2A)	Low speed 200Hz (0.5A)	AC/DC (2A)	AC (1A)	
FBs-10MA △-⊙	No	2 ports (Port1~2, RS485 or RS232 or Ethernet) 1 port (Port0, USB or RS232)		4 points	2 points	4 points		4 points		Figure 2
FBs-10MAT ◇△-⊙										Figure 2
FBs-10MAS △-⊙					4 points				4 points	
FBs-14MA △-⊙								6 points		Figure 2
FBs-14MAT ◇△-⊙					4 points	2 points				
FBs-14MAS △-⊙									6 points	Figure 1
FBs-20MA △-⊙					8 points	4 points	4 points	8 points		
FBs-20MAT ◇△-⊙									8 points	Figure 1
FBs-20MAS △-⊙					10 points	4 points	6 points	10 points		
FBs-24MA △-⊙									10 points	Figure 1
FBs-24MAT ◇△-⊙					16 points	4 points	8 points	12 points		
FBs-24MAS △-⊙									12 points	Figure 1
FBs-32MA △-⊙					20 points	4 points	12 points	16 points		
FBs-32MAT ◇△-⊙									16 points	Figure 1
FBs-32MAS △-⊙					32 points	4 points	20 points	24 points		
FBs-40MA △-⊙									24 points	
FBs-40MAT ◇△-⊙										
FBs-40MAS △-⊙										
FBs-60MA △-⊙										
FBs-60MAT ◇△-⊙										
FBs-60MAS △-⊙										

△ : Port0 interface: Blank—RS232, U—USB

◇ : Transistor output type: Blank—SINK output (NPN), J—SRCE output (PNP)

⊙ : Power supply: Blank—AC power supply (100 ~ 240 VAC), D—DC power supply (24 VDC)

■ Digital expansion units

(7.62 mm terminal block)



FBs-24EAP(T,S)



FBs-40EAP(T,S)



FBs-60EAP(T,S)

Specification Model number	Digital input		Digital output			Dimension
	24VDC		Transistor (5 ~ 30VDC)	Relay	Thyristor	
	Low speed 4.7ms		Low speed 200Hz (0.5A)	AC/DC (2A)	AC (1A)	
FBs-24EAP-⊙	14 points		10 points	10 points		Figure 1
FBs-24EAPT △-⊙						
FBs-24EAPS-⊙					10 points	
FBs-40EAP-⊙	24 points		16 points	16 points		Figure 1
FBs-40EAPT △-⊙						
FBs-40EAPS-⊙					16 points	
FBs-60EAP-⊙	36 points		24 points	24 points		Figure 1
FBs-60EAPT △-⊙						
FBs-60EAPS-⊙					24 points	

△ : Transistor output type: Blank—SINK output (NPN), J—SRCE output (PNP)

◇ : Power supply: Blank—AC power supply (100 ~ 240 VAC), D—DC power supply (24 VDC)

Digital expansion modules



FBs-8EA(T,S)



FBs-16EA(T,S)



FBs-8EX



FBs-20EX



FBs-8EY(T,S)



FBs-16EY(T,S)



FBs-24EX



FBs-24EYT



FBs-24EA(T,S)



FBs-40EA(T,S)



FBs-60EA(T,S)

Specification Model number	Digital input	Digital output				Wiring mechanism	Dimension
	24VDC	Transistor (5 ~ 30VDC)		Relay	Thyristor		
	Low speed 4.7mS	Low speed 200Hz		AC/DC (2A)	AC (1A)		
		(0.5A)	High density (0.1A)				
FBs-8EA	4 points			4 points		7.62 mm pitch terminal block	Figure 4
FBs-8EAT ◇		4 points					
FBs-8EAS					4 points		
FBs-8EX	8 points						
FBs-8EY				8 points			
FBs-8EYT ◇		8 points					
FBs-8EYS					8 points		
FBs-16EA	8 points			8 points			Figure 3
FBs-16EAT ◇		8 points					
FBs-16EAS					8 points		
FBs-20EX	20 points						
FBs-16EY				16 points			
FBs-16EYT ◇		16 points					
FBs-16EYS					16 points		
FBs-24EX	24 points					30 pins header with latch	Figure 4
FBs-24EYT		24 points					
FBs-24EA	14 points			10 points		7.62 mm pitch terminal block	Figure 1
FBs-24EAT ◇		10 points					
FBs-24EAS					10 points		
FBs-40EA	24 points			16 points			
FBs-40EAT ◇		16 points					
FBs-40EAS					16 points		
FBs-60EA	36 points			24 points			Figure 1
FBs-60EAT ◇		24 points					
FBs-60EAS					24 points		

◇ : Transistor output type: Blank—SINK output (NPN), J—SRCE output (PNP)

Power supply for expansion modules (7.62 mm terminal block)



FBs-EPOW



FBs-EPOW-D

Specification Model number	Power input	Residual capacity of output power			Dimension
		5VDC (Logic circuit)	24VDC (Input circuit)	24VDC (Output circuit)	
FBs-EPOW	100 ~ 240VAC -15%/+10%, 21W	400mA	250mA	250mA	Figure 4
FBs-EPOW-D	24VDC -15%/+20%, 12W	400mA	400mA*	250mA	

* Directly from input power, but limited by specifications of circuit and fuses, with capacity of 400mA

Thumbwheel switch input module (30 pins header with latch)



FBs-32DGI

Specification Model number	Input method	Occupied IR number	Refresh time for input	Dimension
FBs-32DGI	16-bit (4 digits) x 8 multiplexing input scan	8 words (32 digits/128 individual points)	10mS max. (IO ASIC)	Figure 4

7/16-segment LED display modules / Analog input (AI) module / Analog output (AO) modules / Analog input/output (AI/O) module

7/16-segment LED display modules

(16 pins box header)



FBs-7SG1



FBs-7SG2

Module number		FB-7SG1	FB-7SG2
Specification			
Display mode	Decoding display	4 bits to represent a character. It can display 16 kinds of pre-decoded character including 0 ~ 9, -, H, E, c, t and all blank	
	Non-decoding display	Each segment controlled by 1 individual bit	
Display number of character or points of LED		8 (4*) characters or 64 points individual LED	16 (8*) characters or 128 points individual LED
Refresh time for display		10mS max. (IO ASIC)	
LED driving specification	Driving current	40mA /segment	
	Display method	1 ~ 8 characters multiplexing display	
	Driving voltage	5VDC (can be 10% up)	
	Low voltage High voltage	7.5V, 10V, 12.5V selectable (can be 10% up)	
Fine tune of voltage drop		0.6V, 1.2V, 1.8V selectable	
Over voltage driving indication		Each channel has individual over voltage (O.V.) driving LED indication	
Wiring method		16 pins flat cable, 2.54mm header connector	
Isolation method		Photocouple isolation	
Power input		24VDC -15%/+20%, static consumption is 2VA max, dynamic current is increased according to display.	
Dimensions		Figure 4	

* : For 16-segment alphanumeric character

Analog input (AI) module

(7.62 mm terminal block)



FBs-6AD

Item		Voltage input	Current input
Specification			
Number of input point		6 points / 14-bit	
Digital input value		-8192 ~ +8191 or 0 ~ 16383	
Input signal range	Bipolar	-10 ~ 10V or -5 ~ 5V	-20 ~ 20mA or -10 ~ 10mA
	Unipolar	0 ~ 10V or 0 ~ 5V	0 ~ 20mA or 0 ~ 10mA
Maximum resolution		0.3mV (5V/16384)	0.61mA (10mA/16384)
Accuracy		±1%	
Conversion time		Conversion once for each scan	
Maximum input signal		±15V	±30mA
Input impedance		63.2KΩ	250Ω
Isolation method		Transformer (Power) and photocouple (signal) isolation	
Power input		24VDC -15%/+20%, 2VA max.	
Dimensions		Figure 4	

Analog output (AO) modules

(7.62 mm terminal block)



FBs-2DA



FBs-4DA

Module number		FBs-2DA	FBs-4DA
Specification			
Number of output point		2 points / 14-bit	4 points / 14-bit
Digital output value		-8192 ~ +8191 or 0 ~ 16383	
Output signal range	Bipolar	Voltage : -10 ~ 10V or -5 ~ 5V , Current : -20 ~ 20mA or -10 ~ 10mA	
	Unipolar	Voltage : 0 ~ 10V or 0 ~ 5V , Current : 0 ~ 20mA or 0 ~ 10mA	
Maximum Resolution		Voltage : 0.3mV (5V/16384) , Current : 0.61mA (10mA/16384)	
Accuracy		±1%	
Conversion time		Conversion once for each scan	
Maximum allowable loading		Voltage : 500Ω ~ 1 MΩ : Current : 0Ω ~ 500Ω	
Isolation method		Transformer (Power) and photocouple (signal) isolation	
Power input		24VDC -15%/+20%, 2VA max	
Dimensions		Figure 4	

Analog input/output (AI/O) module

(7.62 mm terminal block)



FBs-4A2D

Item	Specification
Number of input/output point	4 points AI / 14-bit + 2 points AO / 14-bit
Analog input specification	Same as FBs-6AD
Analog output specification	Same as FBs-2DA / 4DA
Dimensions	Figure 4

Model Specifications

Thermocouple modules / RTD modules / FB-DAP simple human-machine interfaces / RFID cards

■ Thermocouple modules

(7.62 mm terminal block)



FBs-TC2

FBs-TC6



FBs-TC16

Model number	FBs-TC2	FBs-TC6	FBs-TC16
Specification			
Number of input points	2 points	6 points	16 points
Thermocouple type and temperature measurement range	J (-200~1200°C) E (-190~1000°C) K (-190~1300°C) T (-190~380°C) R (0~1800°C) B (350~1800°C) S (0~1700°C) N (-200~1000°C)		
Temperature compensation	Built-in cold junction compensation		
Resolution	0.1°C		
Temperature refresh time	1 or 2 seconds	2 or 4 seconds	3 or 6 seconds
Overall Precision	± (1%+1°C)		
Isolation method	Transformer (power) and photocouple (signal) isolation (per-channel isolation)		
Power input	24VDC -15%/+20% .2VA max.		
Dimensions	Figure 4		Figure1

■ RTD modules

(7.62 mm terminal block)



FBs-RTD6



FBs-RTD16

Model number	FBs-RTD6	FBs-RTD16
Specification		
Number of input points	6 points	16 points
RTD type and temperature measurement range	3-wire RTD sensor (JIS or DIN) Pt-100(-200°C~850°C) Pt-1000((-200°C~600°C)	
Resolution	0.1°C	
Temperature refresh time	1 or 2 seconds	2 or 4 seconds
Overall Precision	± 1%	
Isolation method	Transformer (power) and photocouple (signal) isolation (no isolation between channels)	
Power input	24VDC -15%/+20% .2VA max.	
Dimensions	Figure 4	Figure1

■ FB-DAP simple human-machine interfaces



FB-DAP-B(R)



FB-DAP-C(R)

Model number	FB-DAP-B(R)	FB-DAP-C(R)
Specification		
Display	16-character × 2, 5×7dot matrix LCD display, with LED backlighting	
Key pads	20 (4×5) membrane	
Power input	24V . 41mA (48mA)	5V . 100mA (120mA)
Communication Interface	Electric	RS485
	Mechanism	RS232
	Number of linked station	3 pins European detachable terminal block D-sub 9 pins male connector
General features	Timer, counter, register, relay, access of contact in PLC	
Special features	Alarm, information display, user definable special quick keys	
Card reading feature	Available only in -BR/-CR models, with maximum distance of 12 ~ 18 cm	
Card writing feature	Read/Write-able CARD-2 card, specified models(-BW/-CW) only	
Dimensions	Figure 7	

■ RFID cards



CARD-1

CARD-2

Model number	CARD-1	CARD-2
Specification		
Memory	64-bit + CRC error detecting codes	
Working temperature	-25°C ~ 50°C (ISO 7810)	
Writing times	Read-only	At least 10000 times
Dimensions (mm)	86×54×1.3	
Weight (g)	12	

Memory pack / Communication modules (CM) / Communication boards (CB)

Memory pack



FBs-PACK

Item	Specification
Memory	1M bits FLASH ROM
Memory capacity	20K words program + 20K words data
Write protection	DIP switch ON/OFF protection

Communication modules (CM)



FBs-CM22



FBs-CM55



FBs-CM25



FBs-CM25E



FBs-CM55E



FBs-CM25C



FBs-CM5R



FBs-CM5H

Model/Item	Specification	Dimension
FBs-CM22	2 RS232 ports (Port3+Port4) with TX, RX indicators	Figure 5
FBs-CM55	2 RS485 ports (Port3+Port4) with TX, RX indicators	
FBs-CM25	1 RS232 (Port3) + 1 RS485 (Port4) with TX, RX indicators	
FBs-CM25E	1 RS232 (Port3) + 1 RS485 (Port4) with Ethernet interface and RUN, LINK, TX, RX indicators	
FBs-CM55E	2 RS485 ports (Port3+Port4) with Ethernet interface and RUN, LINK, TX, RX indicators	
FBs-CM25C	General purpose optical isolation RS232→RS485 converter, with RX indicators	
FBs-CM5R	General purpose optical isolation RS485 repeater, with RX indicators	Figure 4
FBs-CM5H	General purpose optical isolation four ports RS485 Hub, with ACT, COLLISION indicators	

RS232 Specification	Mechanism	DB-9F standard plug
	Electric	EIA RS232 standard specifications
RS485 Specification	Mechanism	3-pin European plug-able terminal block
	Electric	EIA RS485 standard specifications with built-in termination resistor
Ethernet Specification	Mechanism	4-pin European plug-able terminal block
	Electric	10BaseT, IEEE 802.3 standard

Communication boards (CB)



FBs-CB2



FBs-CB22



FBs-CB5



FBs-CB55



FBs-CB25



FBs-CBE

Model/Item		Specification
FBs-CB2		1 RS232 port (Port2), with TX, RX indicators
FBs-CB22		2 RS232 ports (Port1+Port2), both with TX, RX indicators
FBs-CB5		1 RS485 port (Port2), with TX, RX indicators
FBs-CB55		2 RS485 ports (Port1+Port2), both with TX, RX indicators
FBs-CB25		1 RS232 port (Port1) +1 RS485 port (Port2), both with TX, RX indicators
FBs-CBE		1 Ethernet 10BaseT interface with LINK, RX and TX indicators
RS232 Specification	Mechanism	DB-9F standard plug
	Electric	EIA RS232 standard specifications
RS485 Specification	Mechanism	3-pin European plug-able terminal block
	Electric	EIA RS485 standard specifications with built-in termination resistor

Other Accessories

Model	Description
FBs-XTNR	Converter box for extension of I/O expansion cables
LED.56R	.56" high-brightness, red color 7-segment LED display
LED.8R	.8" high-brightness, red color 7-segment LED display
LED2.3R	2.3" high-brightness, red color 7-segment LED display
LED4.0R	4.0" high-brightness, red color 7-segment LED display
LEDAN.8R	.8" high-brightness, red color 16-segment LED display
LEDAN2.3R	2.3" high-brightness, red color 16-segment LED display
DB.56 (DB.56LEDR)	.56" 7-segment 8 digits LED display PCB (DB.56LEDR with LED installed)
DB.8 (DB.8LEDR)	.8" 7-segment 8 digits LED display PCB (DB.8LEDR with LED installed)
DB2.3 (DB2.3LEDR)	2.3" 7-segment 8 digits LED display PCB (DB2.3LEDR with LED installed)
DB4.0 (DB4.0LEDR)	4.0" 7-segment 4 digits LED display PCB (DB4.0LEDR with LED installed)
DBAN.8 (DBAN.8LEDR)	.8" 16-segment 4 digits LED display PCB (DBAN.8LEDR with LED installed)
DBAN2.3 (DBAN2.3LEDR)	2.3" 16-segment 4 digits LED display PCB (DBAN2.3LEDR with LED installed)
FBs-232P0-9F-150	Dedicated communication cable for FBs main unit port0(RS232) to 9pin D-sub female connector, 150cm long
FBs-232P0-9M-400	Dedicated communication cable for FBs main unit port0(RS232) to 9pin D-sub male connector, 400cm long
FBs-USBP0-180	Communication cable for FBs main unit port0 (USB) (commercial USB A←→B cable), 180cm long
HD30-22AWG-200	22AWG I/O cable with 30pins socket, 200cm long (for FBs-24EX, 24EYT and 32DGI)



FBs-XTNR



LED.56R



LED.8R



LED2.3R



LED4.0R



LEDAN.8R




LEDAN2.3R



DB0.56LEDR



DB.8LEDR

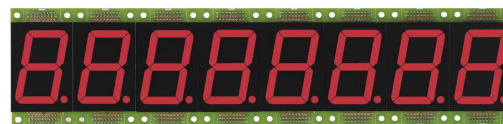


DB2.3LEDR



DB4.0LEDR



DBAN.8LEDR



DBAN2.3LEDR



FBs-232P0-9F-150



FBs-232P0-9M-400



FBs-USBP0-180



HD30-22AWG-200


WinProladder software package

■ WinProladder software package

● General Feature

- Windows based application program following the standard conventions of a windows environment for ease of learning and operation regardless of whether the user is a beginner or frequent user.
- Application environment for project development is via a hierarchical tree. All the elements of the project can be activated by directly clicking the mouse button on the tree object providing comprehensive access and views of the working project.
- Easy entry methods which incorporate both the keyboard and mouse as entry devices. No matter whether on site or in an office environment the software can be operated with ease and efficiency.
- Provides various types of connections to the PLC via a PC. Connections include serial, USB, Ethernet / Internet and Modem. For every different connection WinProladder provides a session name to associate the setting of the communication parameters, such as port no., baud rate, IP address, phone number, etc.

WinProladder

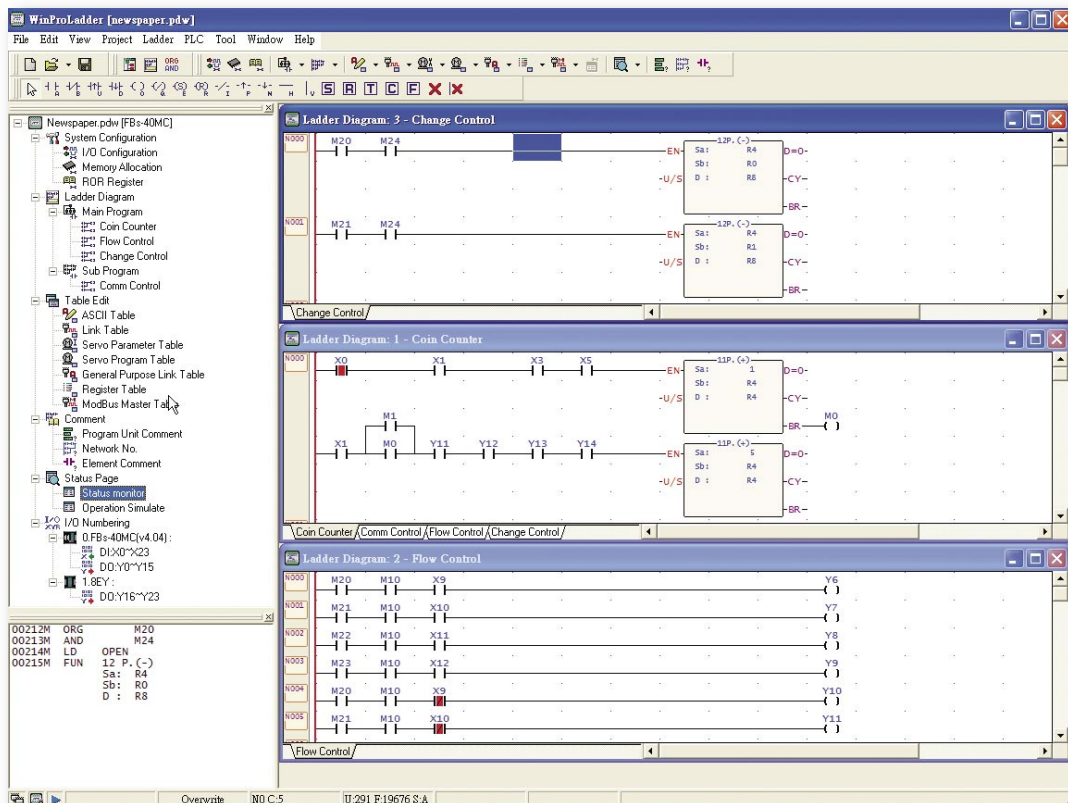

● Program editing

- Provides the on-line program editing capability. After modifying the ladder program the user can send the RUN command immediately without having to re-download the program to PLC. With this feature the application development time is dramatically reduced compared to other PLC's without this feature.
- Ladder program can be edited without stopping the PLC from running (Run time editing).
- Multiple ladder program windows can display different sub groups of the ladder program at one time and allows the copy, paste and compare operation between these windows.
- Provides the flexible ladder network editing capability. With the help of copy, paste and delete highly efficient operation can complete a complex program with fewer keystrokes.
- Provides the capability to divide the whole program into many program units. User can at will partition the whole development task into many independent program units according to the functionality or other classify methodology and perform the entry, editing, testing and documentation independently.
- Provides an individual window for mnemonic instruction display. Immediately display the equivalent mnemonic code corresponding to the ladder network pointed by the cursor.
- Provides the flexible program search capability, can search contact, register or function. Also can set a filter to narrow down the search object to ease the user from picking up the desire results among the whole bunches of search result. Most of all, just double click the interested message line can bring out the corresponding ladder program to the user.
- Provides a powerful syntax check tool. With this tool can parse the user's program and generate a parsing message in one window. In this window all the warning or error messages regard the program will be listed line by line. User just double click the interested line then the ladder program will be shown on the window with the cursor stay on the question part.

● Program testing


- Provides multiple pages of status monitoring. User can monitor and modify the status of discrete contacts and registers on the status page. Each discrete input and output (include the internal relay) can be disabled and forced on or off. Each register can be selected individually to show with different format such as hexadecimal, decimal and binary. Best of all, all the layout of the status pages can be stored in the project and there is no need for user to re-define the page each time when he/she wants to monitor the status.
- Multiple high lighted ladder program display windows. The conducting condition of each contact element can be revealed by the color of the element drawing. The register value embedded with the function block also can be shown currently with ladder diagram. The discrete element can be easily disabled and forced on or off directly from the ladder diagram.

● Program documentation

- Provides discrete element, register, network, and program unit and project comment. Besides the project comment all other comments can be displayed with ladder diagram. With this feature the user can easily realize how the ladder program is working.
- Provides following report printout function:
Ladder diagram printout can select the scope and detail level of the ladder diagram for different kind of reporting requirements.
Used ladder element cross-reference report can list the statistics of all ladder elements used in the project.
- The comment of the contact and register can be created by this software or by using text editor that were familiar with user. Comments can be imported from the text file and also can be exported to the application software such as Excel for further processing.
- The network of ladder program can be copied to other editing software such as Word by using copy and paste function. With this feature, can facilitate the documentation of program when use the editing software.

● Project oriented program


Adopt project concept, which category the whole tasks of program to be developed with hierarchy tree. Through the visual effect the user can see through the whole project at first glance. No matter at program or maintenance stage all the jobs need to do can be performed with intuitive.

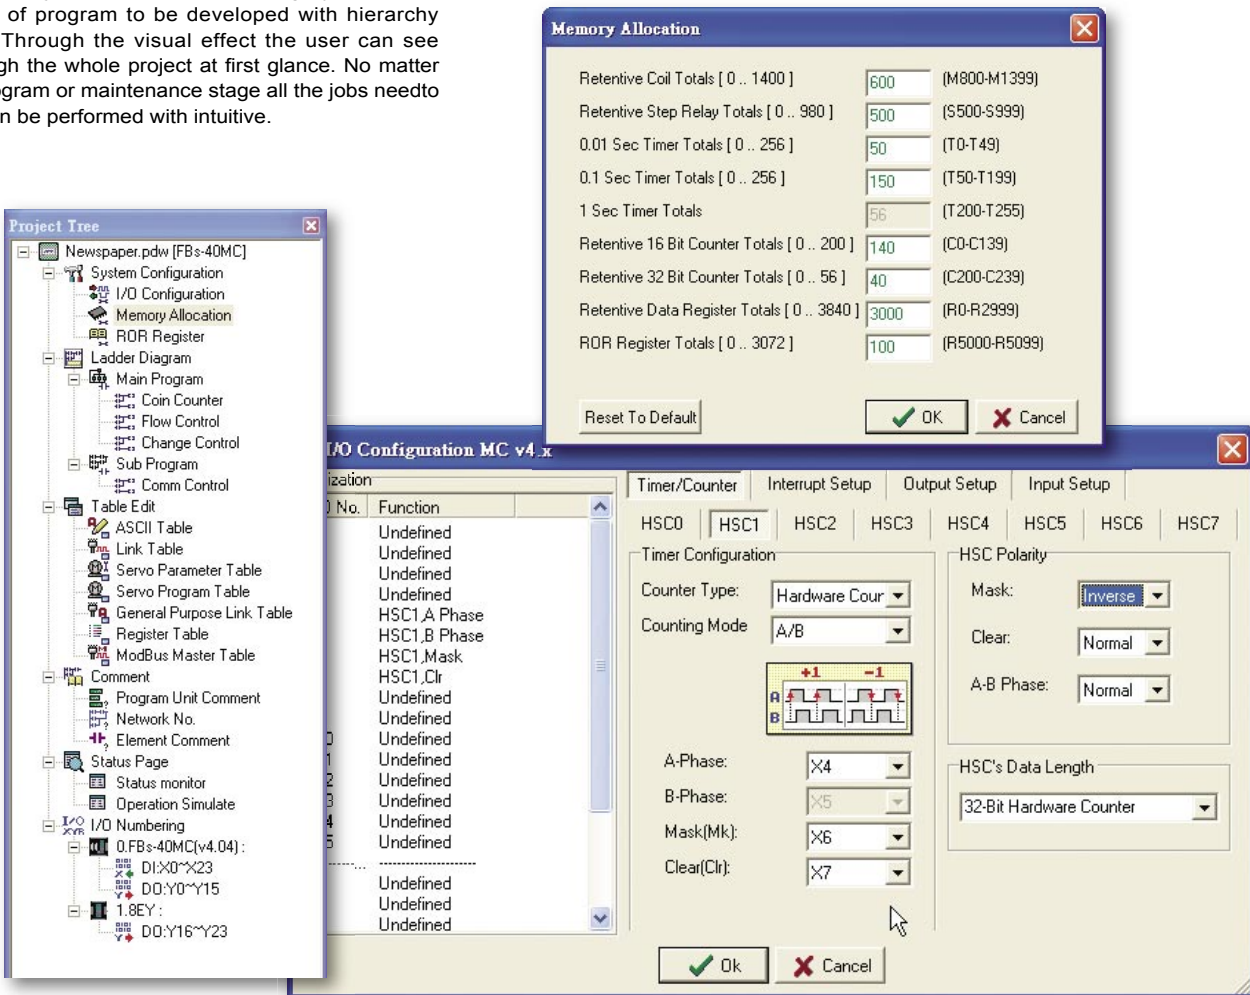

WinProLadder software package

Ladder program editing screen

Multiple ladder windows, can perform the network copy, paste, cut and compare operations among windows.

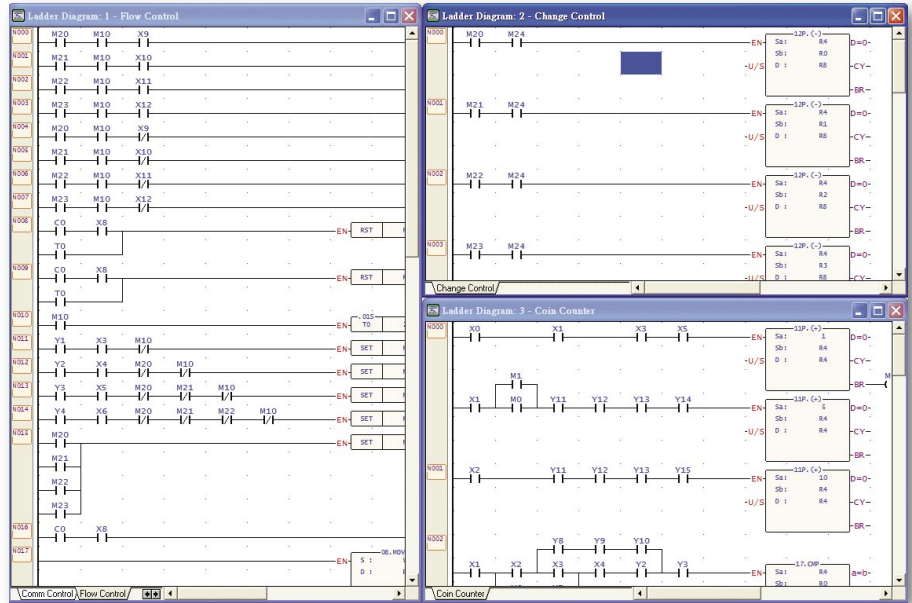

Status monitor and control

Multiple status page window, can define the elements, registers to be monitoring and assign its display format. The state of the contact elements can be disabled and forced. Register value also can be entered.


Comment	Status	Data	Comment	Status	Data	Comment	Status	Data	Comment	Status	Data
\$1 Sensor	Enable	OFF	Newspaper Out	Enable	OFF	Selected	Enable	OFF	Select D	Enable	OFF
\$5 Sensor	Enable	OFF	Button A LED	Enable	OFF	[M11]	Enable	OFF	Finish	Enable	OFF
\$10 Sensor	Enable	OFF	Button B LED	Enable	OFF	[M12]	Enable	OFF	Price A	Enable	Decimal
Select A Button	Enable	OFF	Button C LED	Enable	OFF	[M13]	Enable	OFF	Price B	Enable	Decimal
Select B Button	Enable	OFF	Button D LED	Enable	OFF	[M14]	Enable	OFF	Price C	Enable	Decimal
Select C Button	Enable	OFF	Stop Sale	Enable	OFF	[M15]	Enable	OFF	Price D	Enable	Decimal
Select D Button	Enable	OFF	Motor A	Enable	OFF	[M16]	Enable	OFF	Coin	Enable	Decimal
Change Button	Enable	OFF	Motor B	Enable	OFF	[M17]	Enable	OFF	\$1 Change	Enable	Decimal
Push switch	Enable	OFF	Motor C	Enable	OFF	[M18]	Enable	OFF	\$5 Change	Enable	Decimal
Sensor A	Enable	OFF	Motor D	Enable	OFF	[M19]	Enable	OFF	\$10 Change	Enable	Decimal
Sensor B	Enable	OFF	Demo A	Enable	OFF	Select A	Enable	OFF	total money	Enable	Decimal
Sensor C	Enable	OFF	Demo B	Enable	OFF	Select B	Enable	OFF	[R9]	Enable	Hexadecimal
Sensor D	Enable	OFF	Demo C	Enable	OFF	Select C	Enable	OFF	[R10]	Enable	Decimal
[C13]	Enable	OFF	Demo D	Enable	OFF	Select D	Enable	OFF	[DR20]	Enable	Hexadecimal
[C14]	Enable	OFF	No Change	Enable	OFF	Finish	Enable	OFF	[DR20]	Enable	Decimal
[C15]	Enable	OFF	Change Power	Enable	OFF	[M15]	Enable	OFF	[DR20]	Enable	Binary
						[M16]	Enable	OFF	[R100]	Enable	String
						[M17]	Enable	OFF	[R101]	Enable	String
						[M18]	Enable	OFF	[R102]	Enable	Decimal
						[M19]	Enable	OFF	[DR100]	Enable	Hexadecimal
						Select A	Enable	OFF			
						Select B	Enable	OFF			
						Select C	Enable	OFF			

Multi-page status monitoring

Monitoring status with comment display

Display with different data formats

Multiple high lighted ladder program windows. The conducting condition of each contact element can be revealed by the color of the element drawing. The register value embedded with the function block also can be shown currently with ladder diagram.

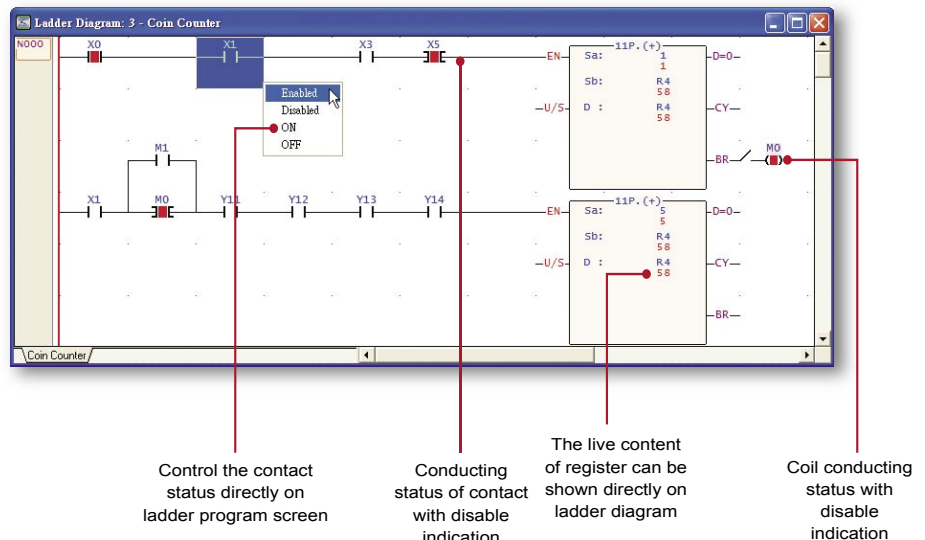


Control the contact status directly on ladder program screen

Conducting status of contact with disable indication

The live content of register can be shown directly on ladder diagram

Coil conducting status with disable indication


● Mnemonic ladder instruction display window

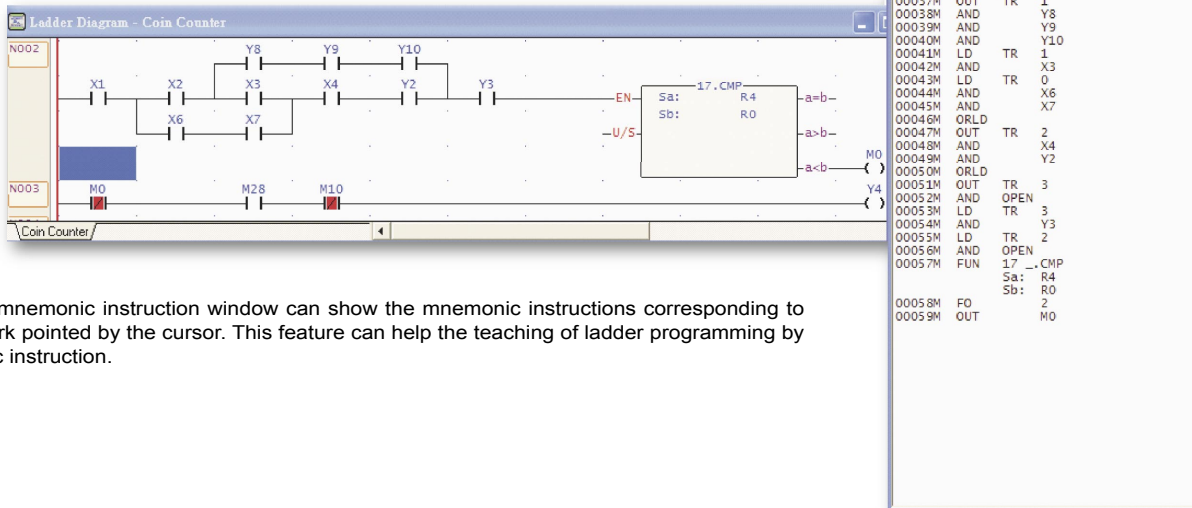

Dedicate mnemonic instruction window can show the mnemonic instructions corresponding to the network pointed by the cursor. This feature can help the teaching of ladder programming by mnemonic instruction.

● Ladder diagram with comments

Provides different detail level of comment for contact, register, network, program unit and program to facilitate the readability and maintenance of the program.

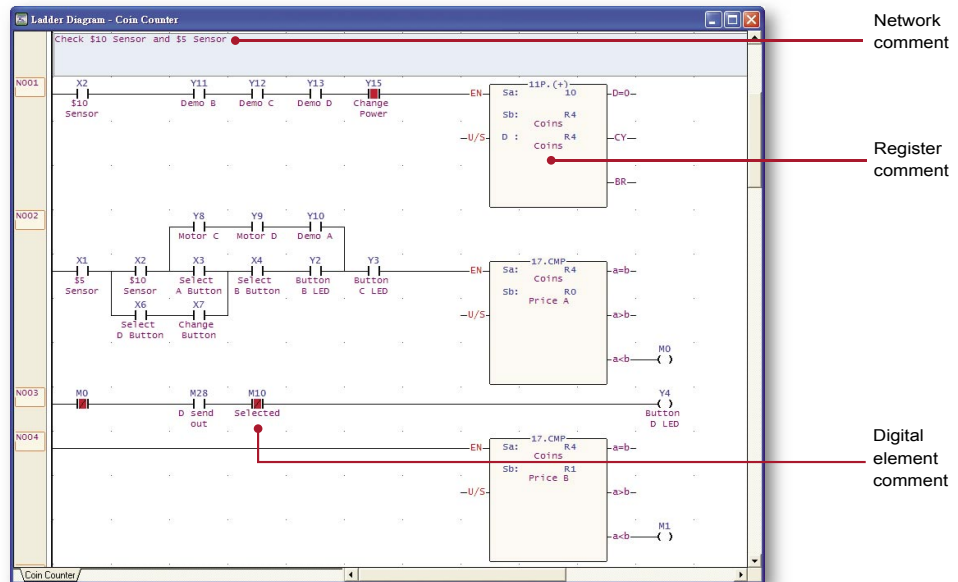

● Element comment editing

With element comment window, can attach an easy for memorizing comment to the elements, detail description also can be added to facilitate the maintenance of project.

Can choose all, used, unused elements for displaying to assist the user to input the comments

Element Comment		
Ref. No.	Comment	Description
Y0	Newspaper Out	'On' when all newspaper sold out
Y1	Button A LED	'On' when collecting coin greater than #1 newspaper price
Y2	Button B LED	'On' when collecting coin greater than #2 newspaper price
Y3	Button C LED	'On' when collecting coin greater than #3 newspaper price
Y4	Button D LED	'On' when collecting coin greater than #4 newspaper price
Y5	Stop Sale	'On' when vending machine malfunction
Y6	Motor A	'On' when #1 newspaper send out
Y7	Motor B	'On' when #2 newspaper send out
Y8	Motor C	'On' when #3 newspaper send out
Y9	Motor D	'On' when #4 newspaper send out
Y10	Demo A	
Y11	Demo B	
Y12	Demo C	
Y13	Demo D	
Y14	No Change	
Y15	Change Power	

The comment, through exporting and importing can be integrated with other application software.

FP-07C handheld programming panel


■ FP-07C handheld programming panel

Features:

- Easy to use and portable, with program editing, copying, status monitoring and debugging functions, most suitable for field maintenance.
- Change working mode only by a single keystroke, without having tedious exit process from current working mode.
- Adopt super capacitor to keep program and data when power lose, convenient for loading data and register from multiple PLCs.




Item		Specification
Power consumption		5V/100mA
Keyboard		48 silicon rubber keys
Display		16x2 dot matrix LCD
Communication port		RS232 serial communication port
Data retention	Method	Kept by super capacitor
	Retention time	At least 7 days
Dimension		Figure 6

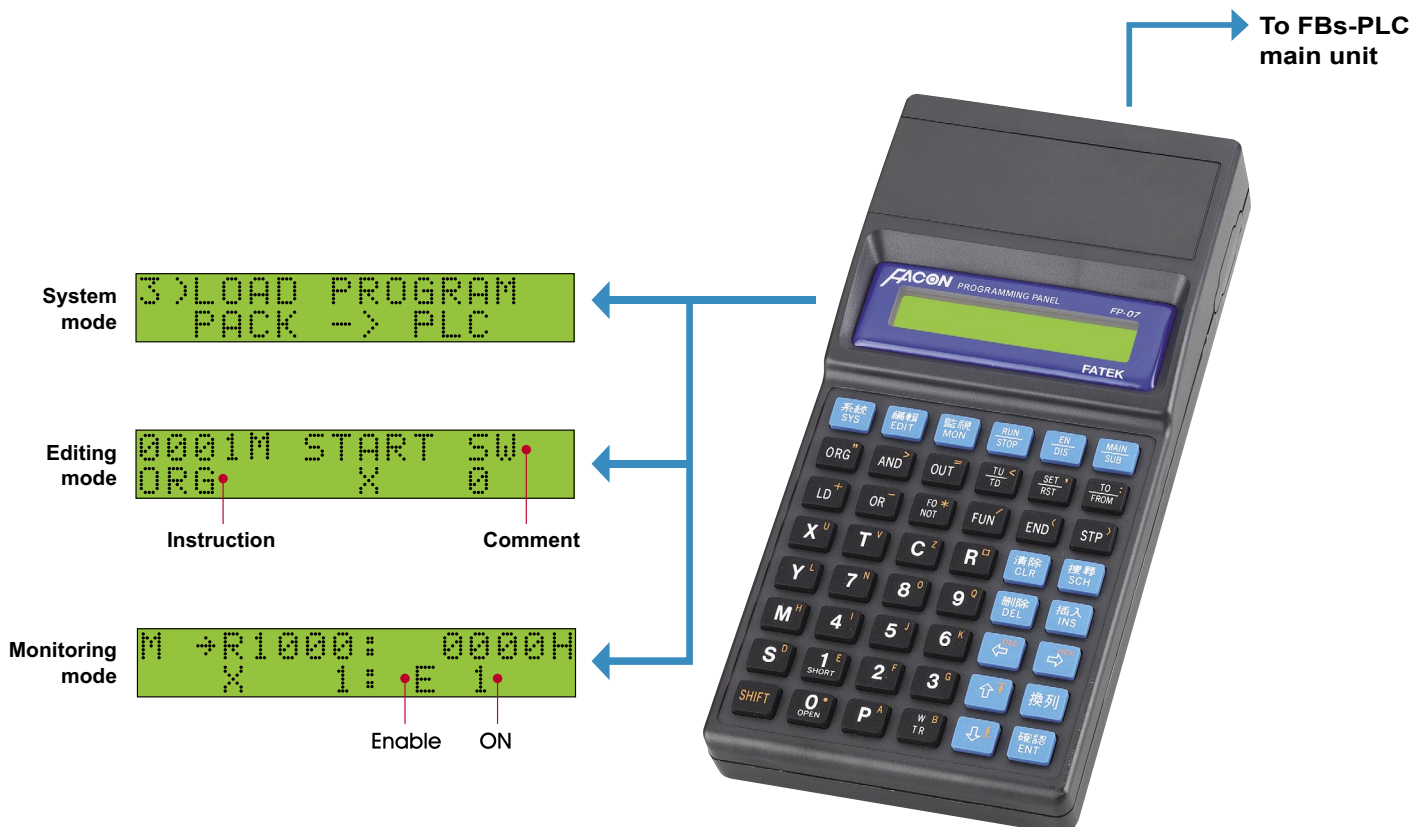

■ Features:


- It contains the basic items required by PLC digital I/O training, such as the FBs-24MCT highly functional main unit, the FBs-CM25E Ethernet module, digital input socket, simulated switches, and digital output socket. Also included in the same kit are advanced application peripherals like encoder and stepping motor (coupled with belt for transmission), seven segment display, 10 large-diameter (10mm) LED indicators, thumbwheel switches, and keyboard. It greatly reduces the time and manpower used in wiring and resource management of teaching.
- The built-in RS232, RS485 and the Ethernet three ports (can be expanded to five with communication boards) not only enable the teacher's computer to connect with the training kits of all students to conduct networking on-line teaching such as loading, monitoring, modifying, and storing, but also can be used in advanced course such as computer connection, intelligent ASCII peripherals as well.
- A special designed software "WinProladder teaching assistant" can let instructor download or upload ladder program to or from the PLC of the whole class or individual through computer. Instructor also can perform monitoring, instruction and modification, and collect and save student's homework periodically with "WinProladder teaching assistant". The teaching software is especially suitable for examination and contest and is the best choice for network teaching.
- PLC output is isolated by the relay with socket and fuse and then output to terminal. These isolations can prevent PLC from damaging caused by incorrect wiring and easy for repair and replacement.

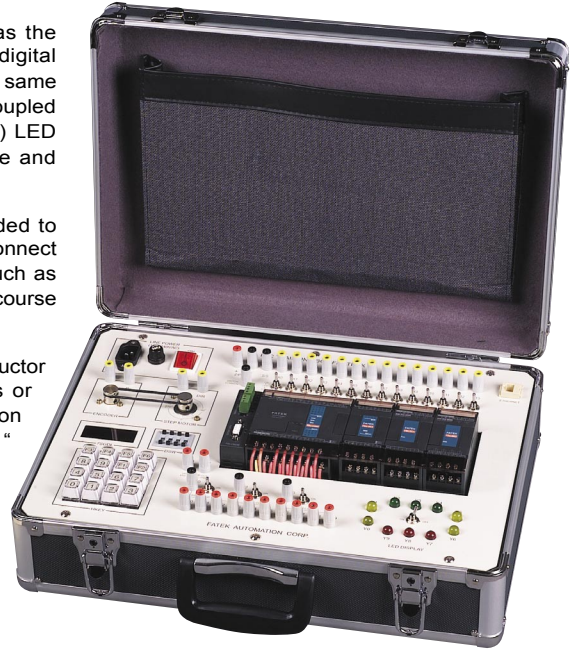

FBs-TBOX

Item		Description	
Case		Aluminum suitcase. Dimension is 46x32x16cm. Top cover and box body can be separated.	
Power supply		100~240VAC / 2A fuse / power switch with indicator	
PLC		FBs-24MCT(transistor output)+FBs-CM25E(Ethernet communication module)	
Programming tool	Programmer	FP-07C handheld programming panel, can develop program, monitor (optional)	
	Winproladder Programming Software	Instructor site: Standard WinProladder with 'teaching assistant' utility	
		Student site: Standard WinProladder	
Communication interface	Built-in	Port0	RS232, Mini-Din connector
	Communication board(CB) (optional)	Port1	RS232 or RS485 selectable, directly mounted on FBs-24MCT main unit
		Port2	
	FBs-CM25E	Port3	RS232, standard DB-9F connector
		Port4	RS485, 3-pin European terminal block
		(Port4)	Ethernet 10BaseT, IEEE 802.3 standard. Use port4 to interface PLC main unit
Input interface		Banana terminal and simulation switch with automatic and manual reset functions	
Output interface		Banana terminal, 10 points. Transistor output(Y0~Y9). All outputs buffer with discrete relay before come to terminal. Y0 and Y1 also provide a direct output terminal for high-speed pulse output (HSPSO) application.	
Expansion module (optional)		Secured by DIN Rail, 12.5cm wide slot, can accommodate three 4cm thin modules or other modules with equivalent width	
Application peripheral	Display module	4 digits 7-segment display module · attached with BCD decoding circuit	
	Thumbwheel switch	4 digits BCD thumbwheel switch module	
	Keyboard module	4 x 4 matrix keyboard module (Wiring coordinate with convenient instruction)	
	Encoder	Power supply 24VDC · 200P/R · open collector · A/B phase	
	Stepping motor	CK/DIR control · 200P/R	
	LED display	10 of 10mmØ high-brightness LED (in red, yellow, and green), driven individually by Y0 to Y9	
Number of linked stations		Maximum 254 stations (1 station for instructor, 253 stations for student)	

Figure 1

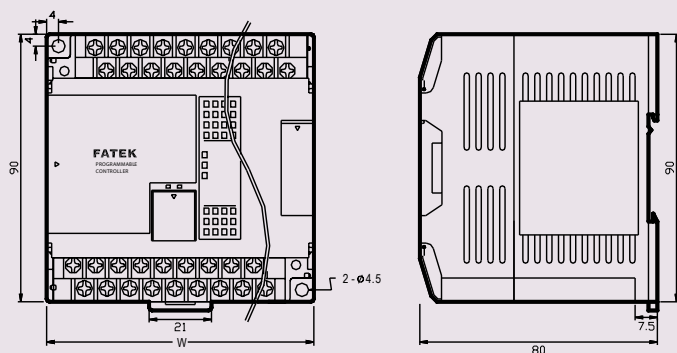

W	Module
90mm	FBs-20M△,FBs-24M△,FBs-24EA(P) FBs-TC16,FBs-RTD16
130mm	FBs-32M△,FBs-40M△,FBs-40EA(P)
175mm	FBs-44MN△,FBs-60M△,FBs-60EA(P)

Figure 2

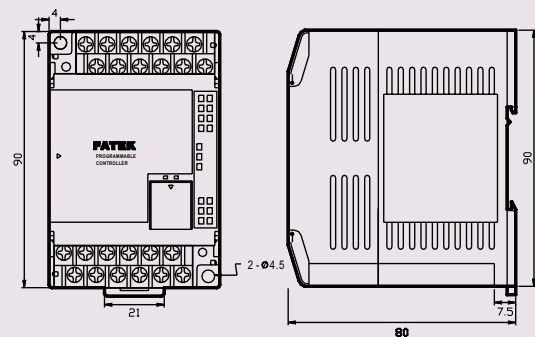


Figure 3

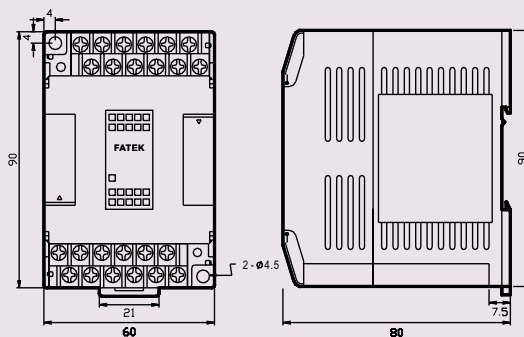


Figure 4

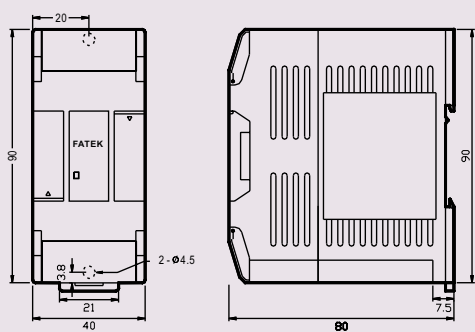


Figure 5

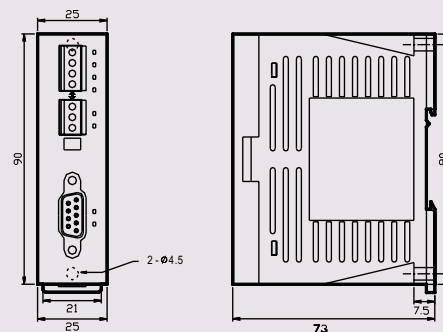


Figure 6

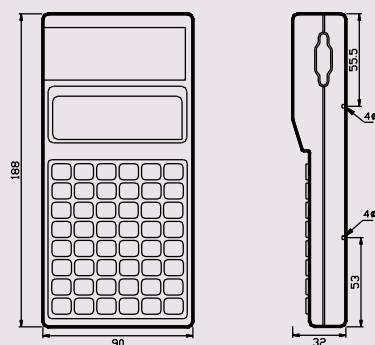


Figure 7

