

PRINCIPLE

The SE series operating principle is simple. A unit is usually located through a bin wall at the top, middle or low level of a bin. During normal operation (no material present) a synchronous motor rotates the paddle at 1 RPM. When this paddle rotation is impeded by material, surrounding the paddle, motor will stall and cause the Micro switch to change state. (indicating an alarm or control)


APPLICATIONS

Suitable for powdery producing & processing industries such as plastic, chemical, medical, forage, cement and fertilizer powders.


FEATURES

- Airtight sealing device, outdoor application is available.
- Unique sealing ring design, it can perform good dust protection to avoid the dust permeate into housing body along with the shaft.
- The torque force is adjustable.
- The performance of torsion is stable and reliable.
- If the rotary paddle bears an extra overload, the motor will be appeared slide to prevent the inside mechanism damaged.
- It is rationally designed, the inside mechanisms are easily tore down for checking, maintenance and replacement. It doesn't necessary to remove the complete set from the tank.
- Very suitable for small tank and material of low density

STRUCTURE

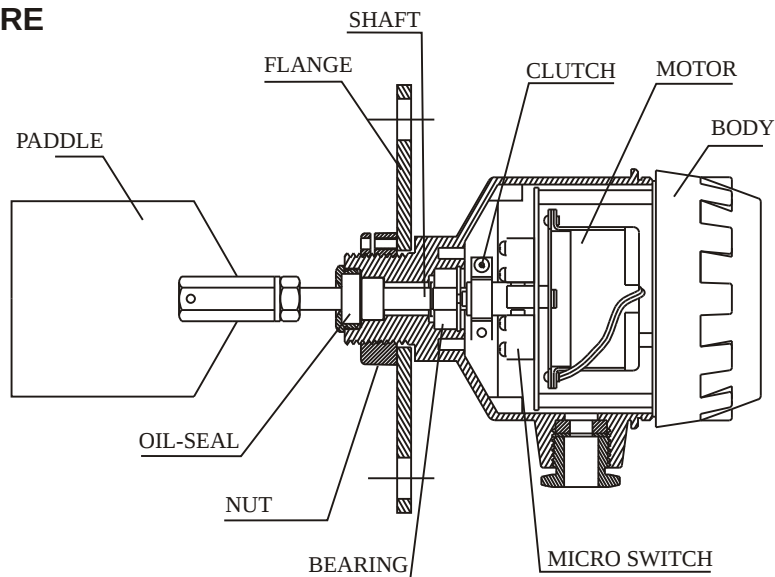

PADDLE TYPE LEVEL SENSOR

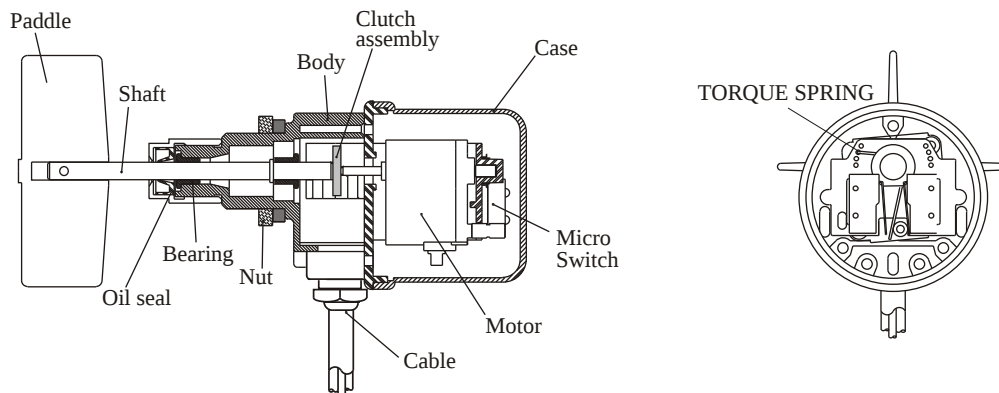


MINI PADDLE TYPE LEVEL SENSOR

WORKING PRINCIPLE & TORQUE ADJUSTING

CONTROL SWITCH DEVICES WORKING PRINCIPLE

1. When the synchronous motor is turning. It means that material isn't touching the paddles, the (C.L) stands for "terminal point connected".
2. When material is touching the paddles, (C.L) stands for "cut-off", (C.H) stands for "connected" the synchronous motor's current is to be cut off.
3. When the material drops away from the paddles, the synchronous motor runs again and the terminal point is connected, (C.L) show that the cycle has begun again.

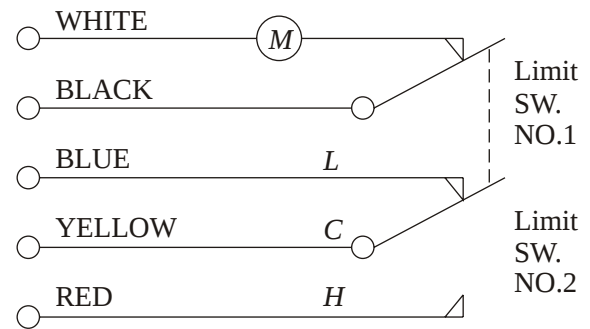


TORQUE ADJUSTING MECHANISM


The torque spring is applied to adjust the shaft output torque force, which is set at "weak" position at factory side, it is adjustable as per customer side target measuring material S.G. (special gravity), if the measured material with higher S.G., please try to release it to more

stronger spring force position step until you found the proper orientation. The paddle sensitivity will be interacted by more weaker, otherwise, the low S.G. material will release torque spring to the weakest position, which will cause the paddle performance to be more sensitive.

- Do not tamper with the spring as it may cause the Rotary Paddle to be malfunction.

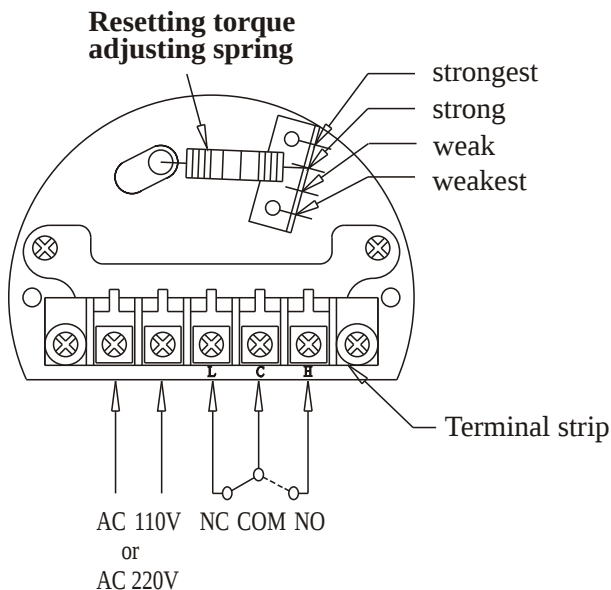

Available: SE110, 120, 130, 140, 160, 170

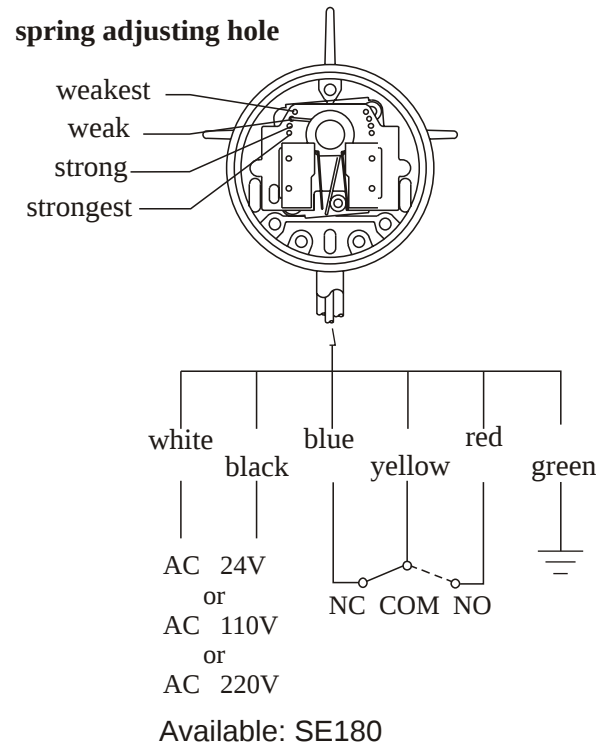

Available: SE180

STANDARD SPECIFICATION


- **Power source** : A-110VAC, B-220VAC, C-240VAC, 50/60Hz
- **Power consumption** : 3W
- **Contact capacity** : SPDT, 5A/250VAC
- **Rotary speed** : 1 R.P.M.
- **Insulation test voltage** : AC 1500V×1minute

- **Torque** : 0.5 ~1.0 kg·cm
- **Connect** : 1"PF screw or JIS 2-1/2"×5kg/cm² flange
- **Protection/ material** : IP65 / ADC-12
- **Conduit** : 1/2"PF
- **Specific gravity** : 0.5g/cm³ (30Lb/ft³)


SE110A/B/C SCREW TYPE

- Horizontal mounting
- Temp. (-10°C ~ 70°C)
- Weight: 1.2 kg

SE110A/B/C

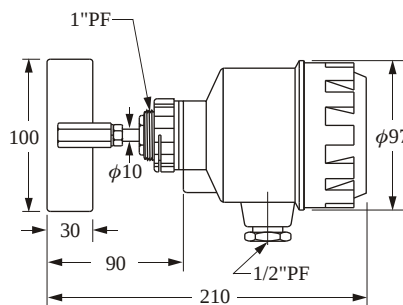

SE111A/B/C

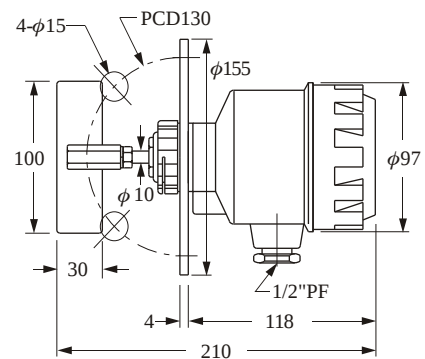


RP111A/B/C FLANGE TYPE

- Horizontal mounting
- Temp. (-10°C ~ 70°C)
- Weight: 1.7 kg


SE120A/B/C SHAFT PROTECTIVE TUBE TYPE

- Horizontal /Vertical mounting
- Temp. (-10°C ~ 70°C)
- Weight: 1.2 kg
- The whole section from flange to paddle are made of SUS 304
- Standard Length (option):
 - L--250mm (2.2 kg)
 - L--500mm (2.5 kg)
 - L--750mm (2.8 kg)
- Special length is made by order

SE120A/B/C

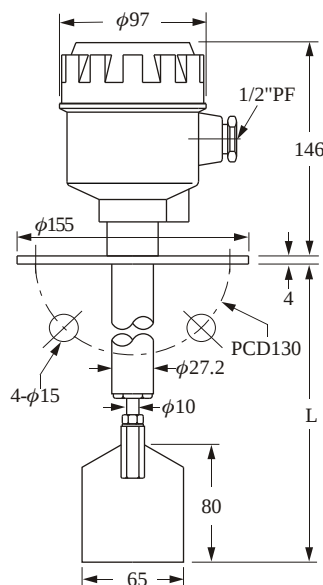

SE130A/B/C

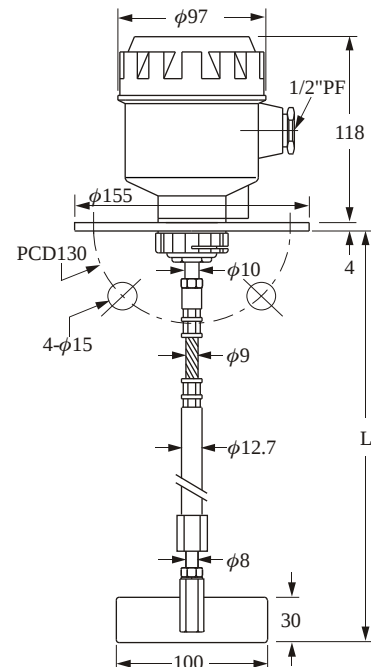

SE130A/B/C SHAFT LENGTH ADJUSTABLE TYPE

- Vertical mounting
- Temp. (-10°C ~ 70°C)
- Standard Length (option):
 - L-- 450 ~650mm (2.5 kg)
 - L-- 650 ~1000mm (2.8 kg)
 - L-- 750 ~1200mm (3.0 kg)
- Special length is made by order

STANDARD SPECIFICATION

- Power source : A-110VAC, B-220VAC, C-240VAC, 50/60Hz
- Power consumption : 3W
- Contact capacity : SPDT, 5A/250VAC
- Rotary speed : 1 R.P.M.
- Insulation test voltage : AC 1500V × 1minute


- Torque : 0.5 ~1.0 kg·cm
- Connect : 1"PF screw or JIS 2-1/2" × 5kg/cm² flange
- Protection/ material : IP65 / ADC-12
- Conduit : 1/2"PF
- Specific gravity : 0.5g/cm³ (30Lb/ft³)

SE140A/B/C

HI-TEMP TYPE

- Horizontal mounting
- Temp. (-10°C ~ 200°C)
- Weight: 2.1 kg

SE140A/B/C

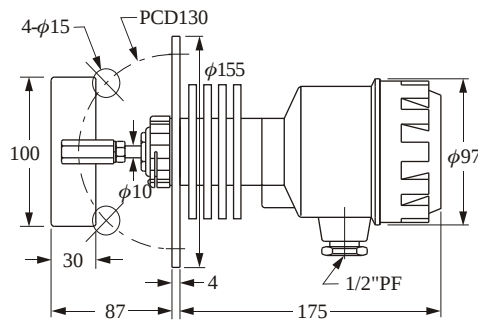


SE141A/B/C

HI-TEMP SHAFT PROTECTIVE TUBE TYPE

- Horizontal /Vertical mounting
- Temp. (-10°C ~ 200°C)
- The whole section from flange to paddle are made of SUS 304
- Standard Length (option):
L--250mm (2.6 kg)
L--500mm (2.9 kg)
L--750mm (3.2 kg)
- Special length is made by order

SE141A/B/C

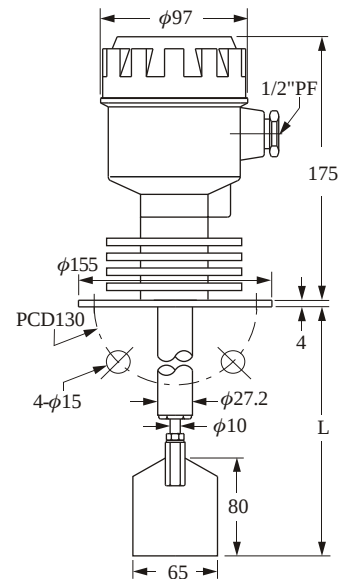


SE146A/B/C

HI-TEMP SHAFT LENGTH ADJUSTABLE TYPE

- Vertical mounting
- Temp. (-10°C ~ 200°C)
- Standard Length (option):
L-- 450 ~650mm (3 kg)
L-- 650 ~1000mm (3.3 kg)
L-- 750 ~1200mm (3.5 kg)
- Special length is made by order

SE146A/B/C

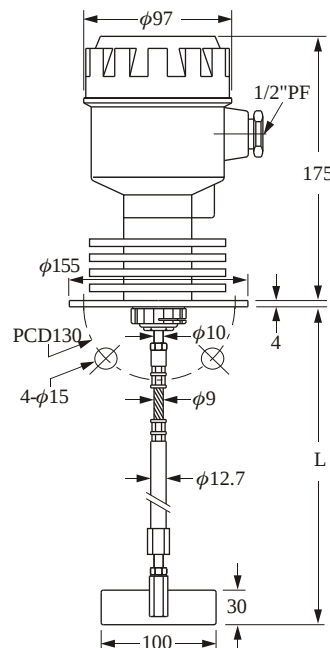


SE160A/B/C

CABLE WIRE TYPE

- Vertical mounting
- Temp. (-10°C ~ 70°C)
- Standard Length (option):
L-- 450mm (2.5 kg)
L-- 650mm (2.8 kg)
L-- 750mm (3 kg)
- Special length is made by order

SE160A/B/C

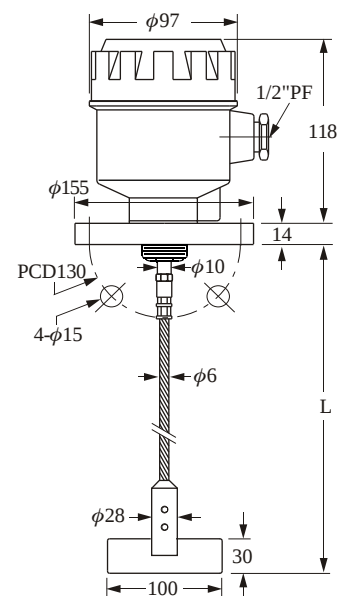


STANDARD SPECIFICATION

- **Power source** : A-110VAC, B-220VAC, C-240VAC, D-24VAC 50/60Hz
- **Power consumption** : 1.5W
- **Contact capacity** : AC 250V 3A
- **Rotary speed** : 1 R.P.M.
- **Protection/ material** : IP65 / PC
- **Temp.** : -10°C ~ 70°C
- **Cable length** : 30cm (available for custom length)
- **Torque** : 30 ~100 kg-cm
- **Specific gravity** : 0.3g/cm³ (20Lb/ft³)


SE180A/B/C/D

CROSS-LIKE 4 BLADE PADDLE

- Horizontal mounting
- Weight : 0.42 kg

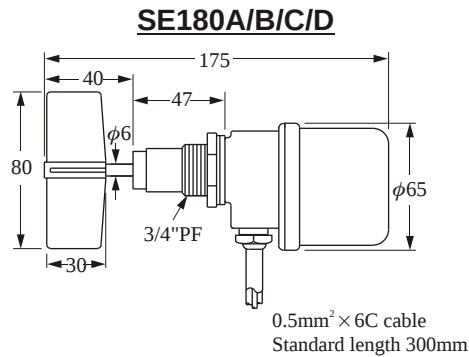

SE180□CRI

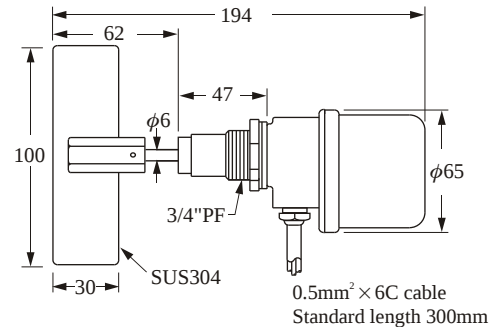


SE180□CRH

SCIMITAR TYPE PADDLE

- Horizontal mounting
- Weight : 0.42 kg

SE180□CRH

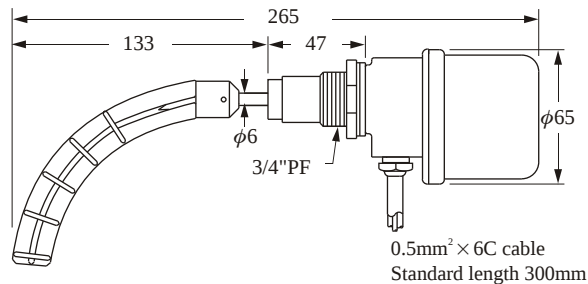

SE180□CRI


RECTANGLE 100×30 SUS304 PADDLE

- Horizontal mounting
- Weight : 0.48 kg

SE184□CRI


HI-TEMP TYPE SUS304 PADDLE

- Horizontal / Vertical mounting
- Temp. Max: 200°C

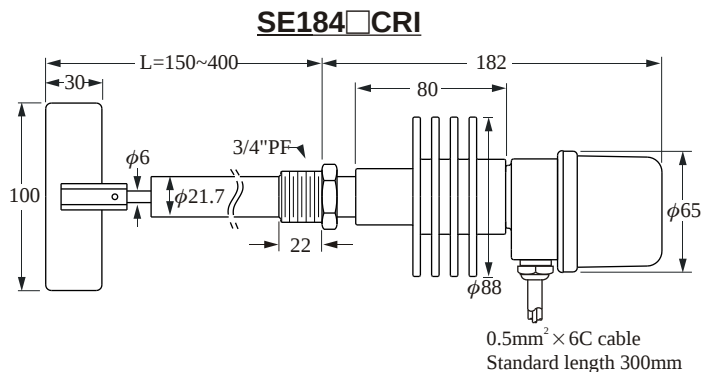


■ Paddle Introduction (Mini)

G




(G) Cross type paddle
material: PC

H



(H) Scimitar type paddle, directly
screwed through 3/4" diameter
fixed hole. Material: PC

I





(I) 100x30 (WxH)
Material: SUS304

EXAMPLES OF MOUNTING

EXAMPLES OF MOUNTING TO TANK

Where the SE110A type paddle cannot be attached to the main shaft from inside the storage tank. The paddle can be set on the main shaft when the distance from the flange face to the tip of paddle is more than 90mm, the relative dimensions being as illustrated right.


The scimitar paddle penetrate through 3/4" PF inlet directly like illustrated drawing, then screw tightly.

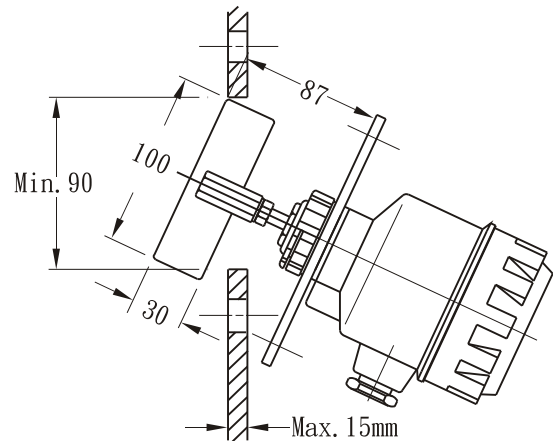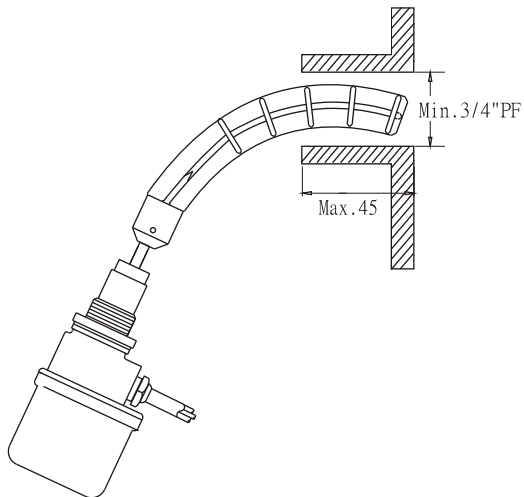


INSTALLATION EXAMPLE FOR INJECTION MOLDING MACHINE

Steps to Install the Injection Molding Machine

- Injection Molding Machine usually use SE180
- Install the Rotary Paddle through a Dia. $\phi 20$ mm Hole on the Silo
- Remove the paddle from the device by taking out the fastening pin
- Insert the SE180 through the mounting hole and tighten it
- After which, secure the Paddle to the SE180 by locking it to the shaft with the the pin
- Keep in mind to 'widen' the opening of the pin in order to secure it

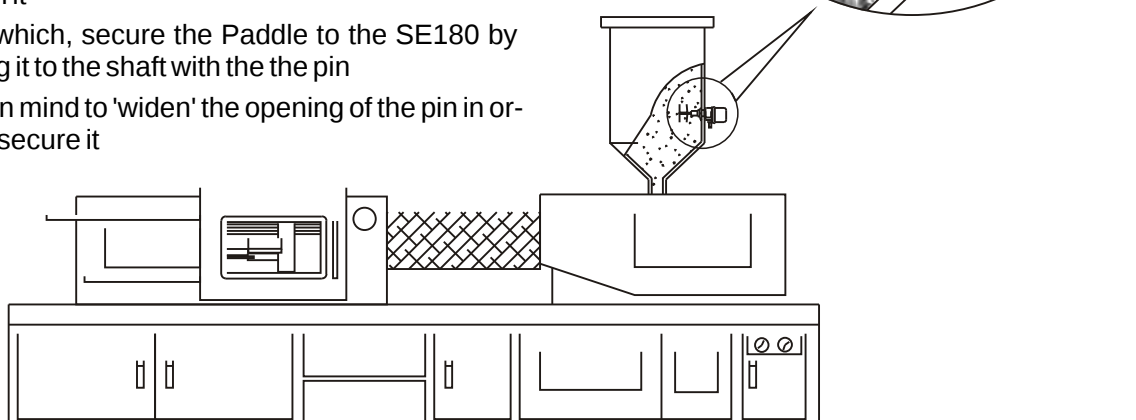

EXAMPLE

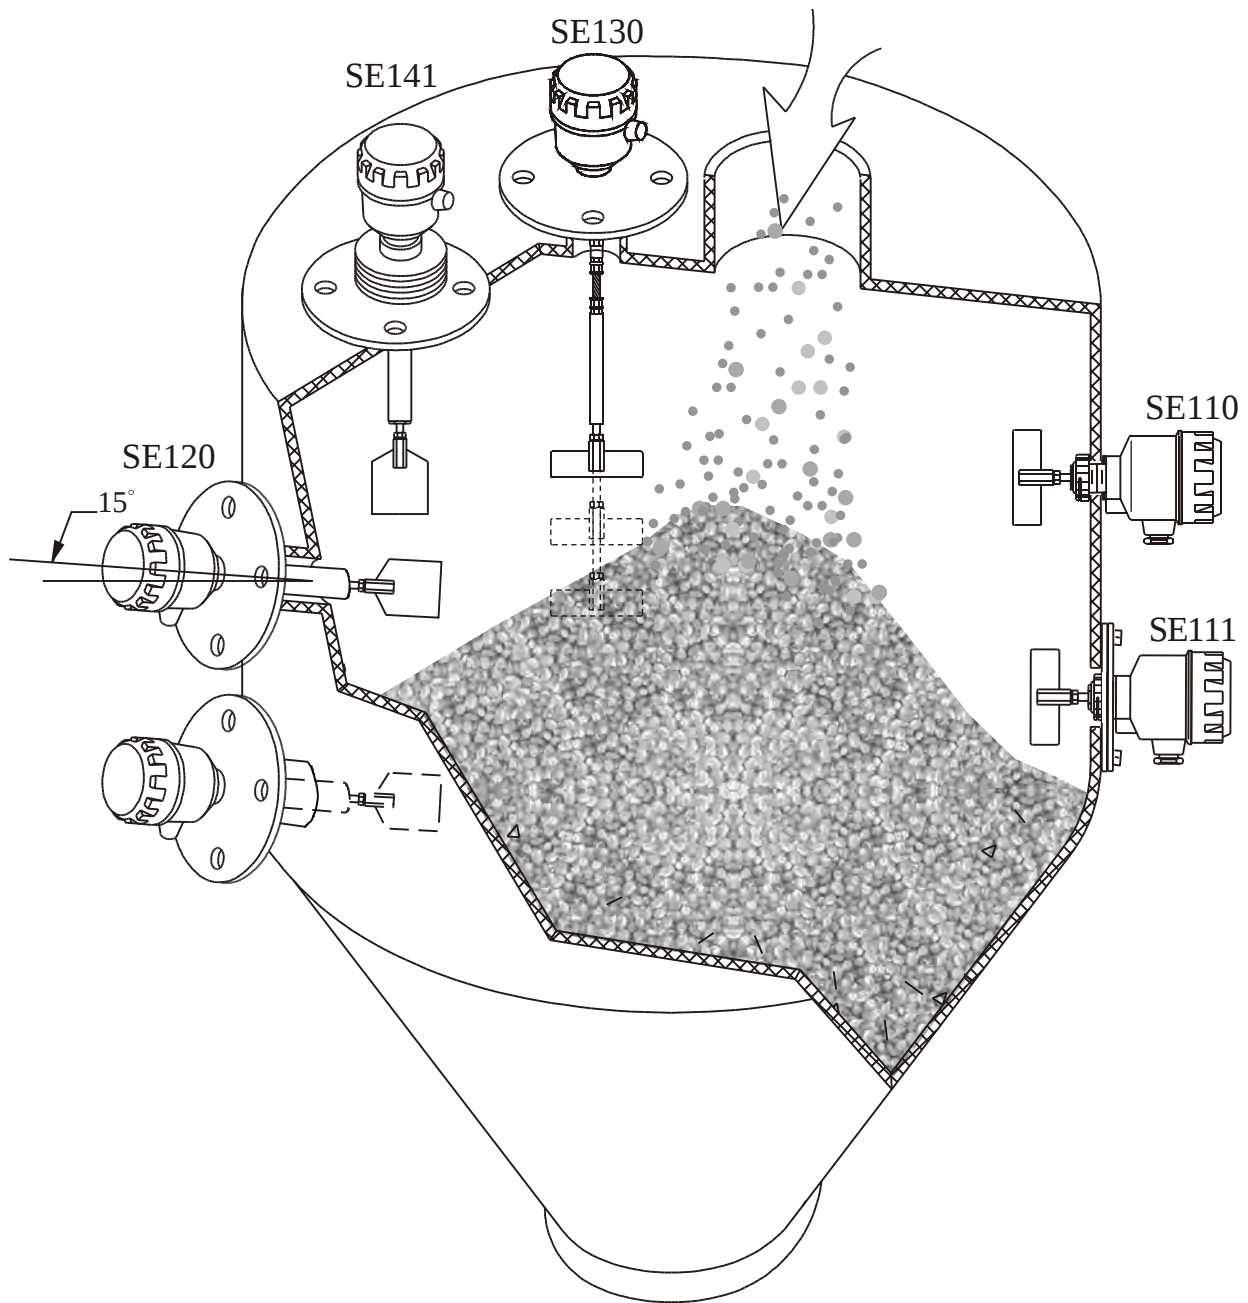

INSTALLATION NOTICES

1. Please side mount the sensor by inclined 15° ~ 20° to decrease the material inflowing impact.
2. For High Temperature application whereby the temperature inside the tank is more than 70°C please use SE14□ Series.
3. SE110~SE140 on 1" connection pipe inlet, please apply scimitar type to screw directly.
4. SE130, SE146 family items are with flexible and extensible shaft.
5. Please ensure that the Cable Gland point downwards and the nut must be fastened to secure the device.

ORDER INFORMATION

SE1

Model

- 1 ☐ : Standard type
 20 ☐ : Shaft protective tube type
 30 ☐ : Shaft length adjustable type
 4 ☐ : Hi-temp type
 60 ☐ : Cable wire type
 8 ☐ : Mini type

Voltage

A: 110V B: 220V C: 240VAC D: 24VAC 50/60HZ

Mounting

Size for flange or screw	
C: 3/4"	I: 4"
D: 1"	J: 5"
E: 1-1/2"	K: 6"
F: 2"	S: Others
G: 2-1/2"	3: 1-1/4"
H: 3"	

Pressure range or other
M: 5kg/cm ²
N: 10kg/cm ²
O: 150 Lbs
P: 300 Lbs
Q: PT
R: PF
T: BSP
U: NPT
S: Others

* SE110~SE160 series:
 The size of connecting screw is 1".


Paddle Shapes

SE110~SE160

- A: 100x30 (WxH)
 B: 65x80 (WxH)
 C: 65x120 (WxH)
 D: 80x80 (WxH)
 E: 50x30 (WxH)
 F: Scimitar

SE180 (Mini paddle type)

- G: Cross type paddle
 H: Scimitar type paddle
 I: 100x30 (WxH)

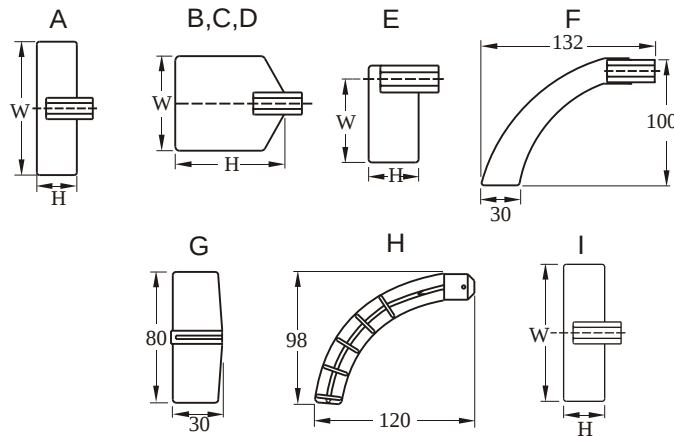

Material:PC

Material:PP

Material:SUS

Length (mm)

SE110~160 L: The distance from flange to paddle.

SE180 L: Length of cable.

The total length of item will be allowed a tolerance to ± 6 mm.

* Order Notice

- Please make sure the Voltage 24VAC, 110VAC, 220VAC or 240VAC, 50/60 Hz.
- Please make sure the side or top mounting.
- Please make sure the material specific gravity (S.G.) value.
- Please make sure whether any bridge block or vibrating motor installed onto the tank wall.
 Please try to apply our item SA140 capacity sensor.
- Please make sure the rotary paddle size is available to enter into the flange inlet.


SPECIFICATION

- **Power source** : A-110VAC, B-220VAC, C-240VAC, 50/60Hz
- **Power consumption** : 3W
- **Contact capacity** : SPDT, 3A/250VAC
- **Rotary speed** : 1 R.P.M.
- **Insulation test voltage** : AC 1500V × 1minute
- **Torque** : 0.5 ~1.0 kg-cm

- **Connect** : 1"PF screw or flange 1"~6"
2-1/2" × 5kg/cm² (std.)
- **Enclosure material** : AL Alloy, ADC-12
- **Enclosure Protection** : Ex d IIB T4~T6
- **Conduit** : 1/2" (std.) or 3/4"NPT
- **Specific gravity** : 0.5g/cm³ (30Lb/ft³)


RP70 A/B/C EXPLOSION PROOF SCREW TYPE

- Horizontal mounting
- Temp. (-10°C ~ 70°C)

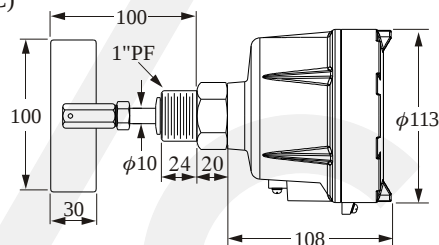


RP71 A/B/C EXPLOSION PROOF FLANGE TYPE

- Horizontal mounting
- Temp. (-10°C ~ 70°C)

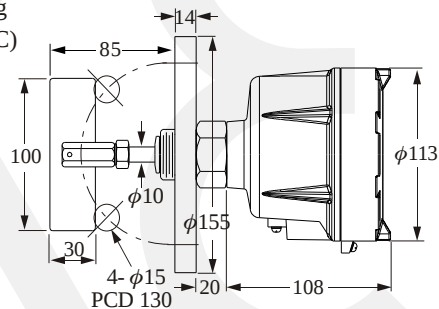


RP73 A/B/C EXPLOSION PROOF SHAFT LENGTH ADJUSTABLE TYPE

- Vertical mounting
- Temp. (-10°C ~ 70°C)
- Standard Length (option):
L-- 450 ~650mm
L-- 650 ~1000mm
L-- 750 ~1200mm
- Special length is made by order

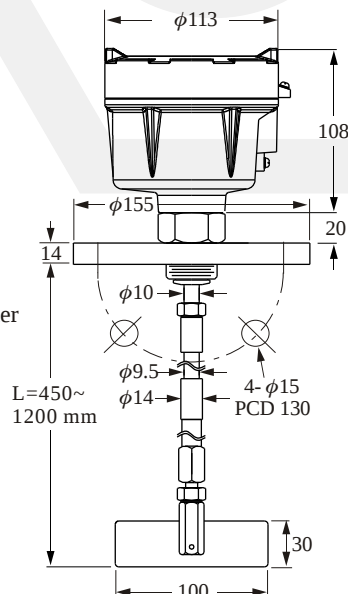


RP72 A/B/C EXPLOSION PROOF SHAFT PROTECTIVE TUBE TYPE

- Horizontal /Vertical mounting
- Temp. (-10°C ~ 70°C)
- Standard Length (option):
L-- 250mm
L-- 500mm
L-- 750mm
- Special length is made by order

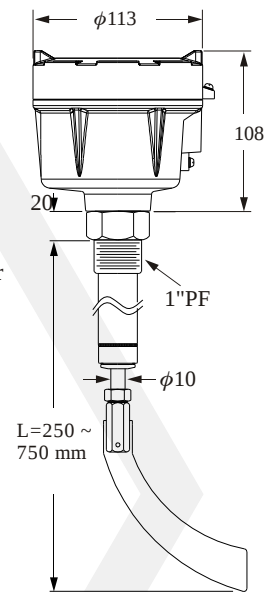

RP74 A/B/C EXPLOSION PROOF HI-TEMP TYPE

- Horizontal mounting
- Temp. (-10°C ~ 200°C)

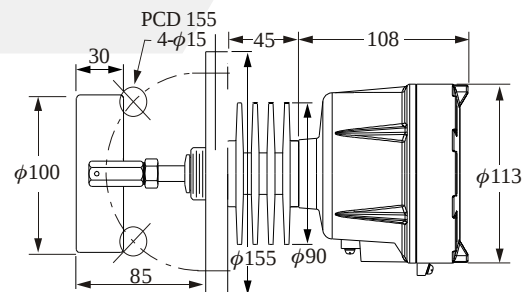


SPECIFICATION

RP75 A/B/C

EXPLOSION PROOF HI-TEMP SHAFT PROTECTIVE TUBE TYPE


- Horizontal /Vertical mounting
- Temp. (-10°C ~ 200°C)
- Special length is made by order

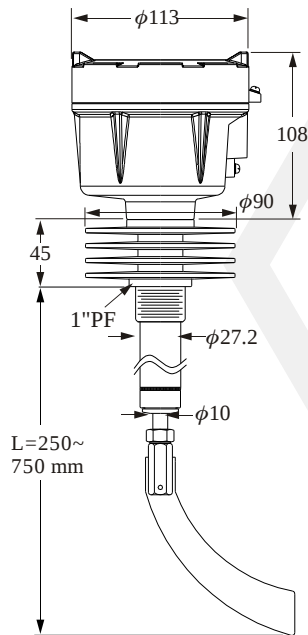

RP76 A/B/C

EXPLOSION PROOF HI-TEMP SHAFT LENGTH ADJUSTABLE TYPE


- Vertical mounting
- Temp. (-10°C ~ 200°C)
- Special length is made by order

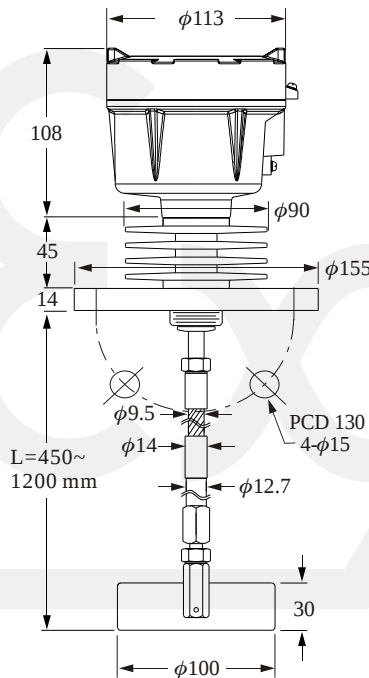


RP77 A/B/C

EXPLOSION PROOF CABLE WIRE TYPE


- Vertical mounting
- Temp. (-10°C ~ 200°C)
- Special length is made by order

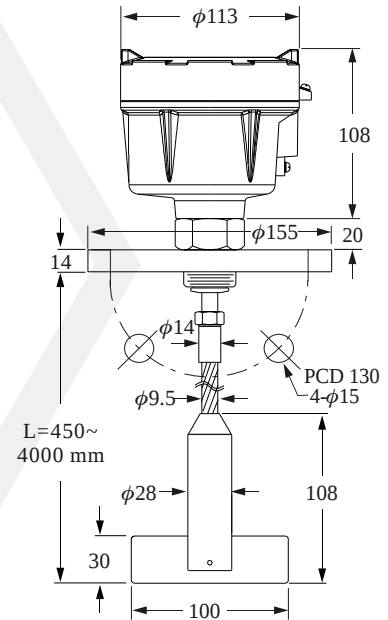


■ Paddle Introduction (Big)




(A) 100x30 (WxH), Min. fixed hole diameter size $\phi 90$ mm.



(E) 50x30 (WxH), Suitable for high S.G. raw material, application by small size paddle to decrease the material flowing impact directly.



(B) 65x80 (WxH), Directly mounted into 2" fixed hole.
(C) 65x120 (WxH), Directly mounted into 2" fixed hole.
(D) 80x80 (WxH)



(F) Scimiter type paddle, Directly screwed through 1" diameter fixed hole, It is more easy to be mounted dispense with labor of tank cut-out.

ORDER INFORMATION

SE1

Model

- 70 : RP70 Screw type

74 : RP74 Hi-temp type
- 71 : RP71 Flange type

75 : RP75 Hi-temp shaft protective tube type
- 72 : RP72 Shaft protective tube type

76 : RP76 Hi-temp shaft length adjustable type
- 73 : RP73 Shaft length adjustable type

77 : RP77 Cable wire type

Voltage

A : 110V

B : 220V

C : 240VAC


D : 24VAC 50/60HZ

Mounting

Size for flange or screw		Pressure range or other
C: 3/4"	I: 4"	M: 5kg/cm ² N: 10kg/cm ² O: 150 Lbs P: 300 Lbs Q: PT R: PF T: BSP U: NPT S: Others
D: 1"	J: 5"	
E: 1-1/2"	K: 6"	
F: 2"	S: Others	
G: 2-1/2"	3: 1-1/4"	
H: 3"		

Paddle Shapes

- A : 100x30 (WxH)
- B : 65x80 (WxH)
- C : 65x120 (WxH)
- D : 80x80 (WxH)
- E : 50x30 (WxH)
- F : Scimitar

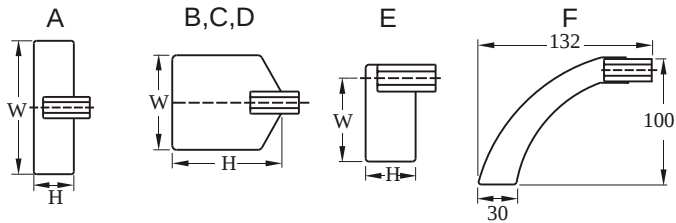

Length (mm)

The total length of item will be allowed a tolerance to 6mm.

* Order Notice

1. Please make sure the Voltage 24VAC, 110VAC, 220VAC or 240VAC, 50/60 Hz.
2. Please make sure the side or top mounting.
3. Please make sure the material specific gravity (S.G.) value.
4. Please make sure whether any bridge block or vibrating motor installed onto the tank wall.
Please try to apply our item SA140 capacity sensor.
5. Please make sure the rotary paddle size is available to enter into the flange inlet.