



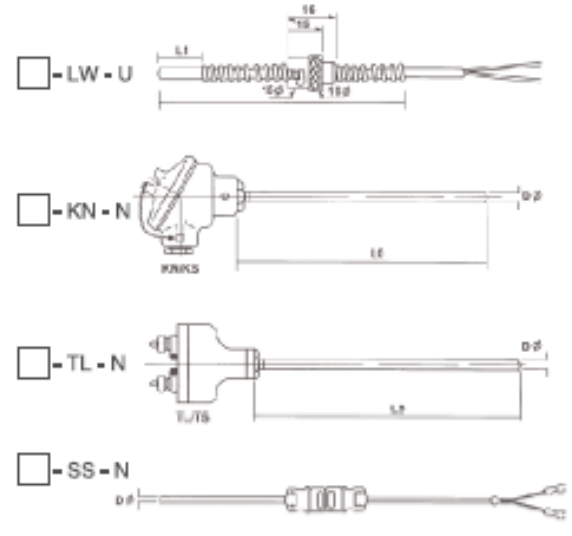

Wire No.	Specification	Temp-Range
TC-CA-H (SOS)	SUS304 Outside Insulation	0~150°C
TC-IC-H (SOS)	SUS304 Outside Insulation	0~150°C
WCA-H	Glass Fiber	0~150°C
WIC-H	Glass Fiber	0~150°C
WPR-H	Glass Fiber	0~150°C
WCA-G	T/C Grade PVC	0~100°C
WIC-G	T/C Grade PVC	0~100°C
RTD-PVC	RTD PVC lead wire	0~100°C
RTD-TF	RTD Teflon lead wire	0~200°C

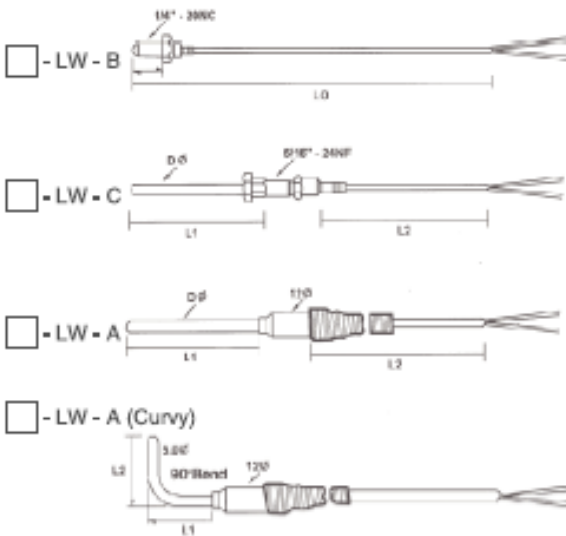

Ordering Information

Type	Code	Terminal Type	Code	Fitting Size	Code	Tube Dia	Code	Tube Length	Code	Material	Code	Lead Wire Length	Code	Material	Code
J	J	Lead Wire	LW	None	N	3,2ø	A	50mm	0500	SUS304	1	1M	001	SUS304	A
K	K	KN Box	KN	Sleeve	A	4,8ø	B	200mm	0200	SUS316	2	10M	010	Fiber glass	B
B	B	KS Box	KS	1/4" - 20NC	B	5,0ø	C			Teflon	3	150M	150	PVC	C
R	R	KS Box	KS	5/16" - 24NC	C	6,3ø	D			Ti	4			Teflon	D
S	S	BN Box	BN	PT1/8" 1	D	8,0ø	E			Ceramic	5				
T	T	Bakelite Box	BS	PT1/4" 2	E	9,6ø	F			Inconel	6				
PT100	D	TL Box	TL	PT3/8" 3	F	10,2ø	G								
		TS Box	TS	PT1/2" 4	G	12,7ø	H								
		Socket (Big)	SN	PT3/4" 6	H	15,0ø	I								
		Socket (Small)	SS	PT1" 8	I	17,0ø	J								
		D2G4	DG	PT1" 8	I	21,7ø	K								
				PF1/8" 1	J										
				PF1/4" 2	K										
				PF3/8" 3	L										
				PF1/2" 4	M										
				PF3/4" 6	O										
				PF1" 8	P										
				M6	Q										
				M8	R										
				M10	S										
				M12	T										
				Bayonet	U										