

# CENTER 232 AC/DC TRUE RMS Power Clamp Meter




LED Back Light



CENTER 232 is used in power system maintenance. Beside power measurement, it also provides the voltage, current measurement and continuity function.

## FEATURES:

- 4 Digital Display
- TRUE RMS
- Autoranging
- Auto Power Off
- Peak Hold Function
- Data Hold Function
- Auto Zero

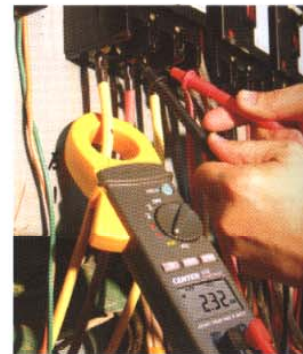

## SPECIFICATIONS

Function	Range	Resolution	Accuracy
ACA	400A / 600A	100mA	$\pm 2\%rdg + 10dgts$
DCA	400A	100mA	$\pm 2\%rdg + 10dgts$
ACV	400V / 600V	0.1V	$\pm 1.2\%rdg + 5dgts$
DCV	400V / 600V	0.1V	$\pm 1\%rdg + 2dgts$
WATT	40KW / 360KW	10W	$\pm 2\%rdg + 10dgts$
Resistor	1000 $\Omega$	0.1 $\Omega$	$\pm 1\%rdg + 3dgts$

Battery	1.5V, size AAA battery x 2
Dimensions	218x64x30 mm
Weight	approx.270g
Jaw Opening Diameter	30 mm

# CENTER 235 AC Leakage Clamp Meter



LED Back Light



Our leakage clamp CENTER 235 has a very good resolution of 10uA. It is very useful for power system check and installation. With the measuring range up to 100A, it is also proper for indoor installation as a normal clamp meter so that the technician only have to bring one tester.

## FEATURES:

- 4 Digital Display
- 10uA Resolution
- Autoranging
- Auto Power Off
- Peak Hold Function
- Data Hold Function
- Auto Zero



## SPECIFICATIONS

Function	Range	Resolution	Accuracy
ACmA	100mA / 1000mA	10uA	$\pm 2\%rdg + 10dgts$
ACA	10A / 100A	1mA	$\pm 2\%rdg + 10dgts$
DCV	600V	0.1V	$\pm 1\%rdg + 2dgts$
ACV	600V	0.1V	$\pm 1.2\%rdg + 5dgts$
Freg	1000Hz	0.1Hz	$\pm 0.1\%rdg + 2dgts$
Resistor	1000 $\Omega$	0.1 $\Omega$	$\pm 1\%rdg + 3dgts$

Battery	1.5V, size AAA battery x 2
Dimensions	218x64x30 mm
Weight	approx.270g
Jaw Opening Diameter	28 mm