


CENTER 110 MULTIMETER

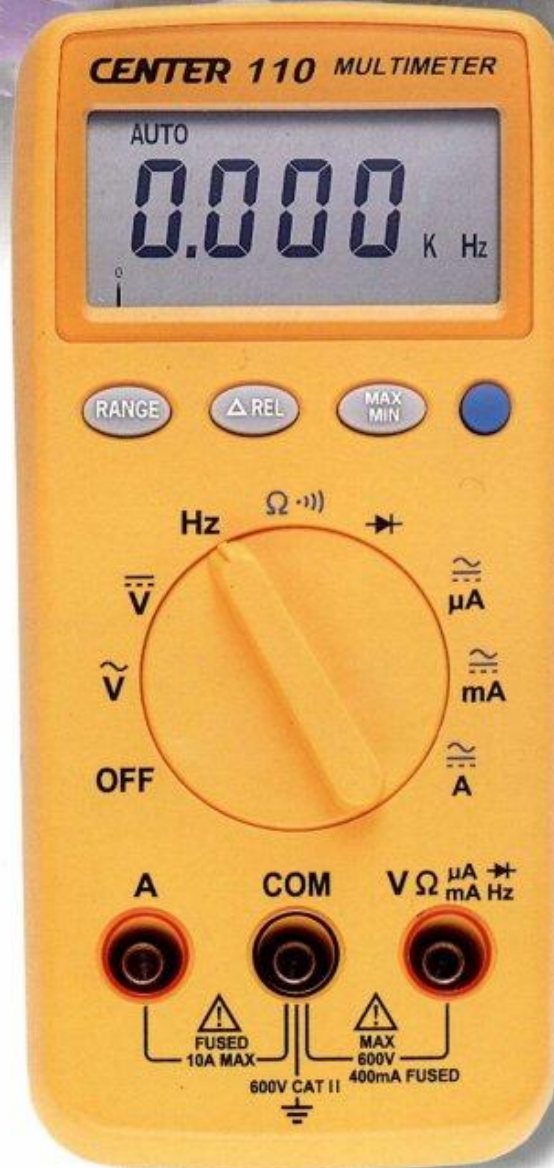

- Autoranging
- 3 3/4 Digits Display
- High Speed Bargraph
- Auto Power Off
- REL Function
- MAX MIN Function


CE IEC 1010 600V CAT II

CENTER[®]

CENTER 110 MULTIMETER

GENERAL SPECIFICATIONS

Sampling Rate: 2 times/sec for digital reading ;
20 times/sec for analog bar indication

Low Battery Indication: The  is displayed.

Auto Power Off: 30 minutes

Battery Life: 500 hours approx. (alkaline)

Battery Type: UM-4, Size AAA, 1.5V × 2

Safety Category: IEC 1010 600V CAT II

Operating Condition: 0°C to 40°C (<80%RH)

Storage Condition: -10°C to 60°C (<70%RH)

Dimensions: 150×72×35mm (5.9"×2.8"×1.4")





Weight: Approx.220g


Accessories: Instruction Manual , Test Lead, Fuse (0.5A), Battery1.5V×2

3-3/4 Digits Display



ELECTRICAL SPECIFICATIONS

Function	Range	Resolution	Accuracy
ACV	400mV	0.1mV	±(1%rdg+4dgt)
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
DCV	400mV	0.1mV	±(0.5%rdg+2dgt)
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	600V	1V	
ACA	400uA	0.1uA	±(1.3%rdg+5dgt)
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
DCA	400uA	0.1uA	±(1%rdg+2dgt)
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
Ohms	400Ω	0.1Ω	±(0.8%rdg+2dgt)
	4KΩ	1Ω	
	40KΩ	10Ω	
	400KΩ	100Ω	
	4MΩ	1KΩ	
	40MΩ	10KΩ	
Hz	4KHz	1Hz	±(0.1%rdg+1dgt)
	40KHz	10Hz	
	400KHz	100Hz	
	4MHz	1KHz	
	40MHz	10KHz	
		Test Current: 1mA	
		Active Sound Level: ≤40Ω	

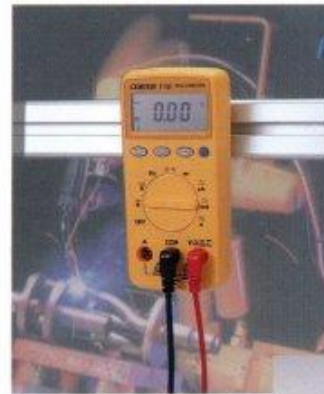

Hang Convenience

Built-in Tilt Stand



CENTER®

Distribuido por: