

CENTER 210/211 AC/AC True RMS Clamp Meter

210 AC CLAMP METER

211 AC TRUE RMS CLAMP METER



CENTER 210 series are mid-size clamp meters. These clamps can measure up to 1000A with resolution 0.01A. 1 ms peak function is also built in this series of clamps. This is especially useful for start current measurement. Maximum, Minimum and Hold are also standard functions for these testers:

210 is an AC clamp meter, 211 is an AC True RME clamp meter and 212 is AC/DC True RMS meter.

FEATURES:

- TRUE RMS
- Autoranging
- Auto Power Off
- High Speed Bargraph
- DATA HOLD Function
- PEAK HOLD Function




CENTER 212 AC/DC True RMS Clamp Meter



FEATURES:

- TRUE RMS
- Autoranging
- Auto Power Off
- High Speed Bargraph
- DATA HOLD Function
- PEAK HOLD Function

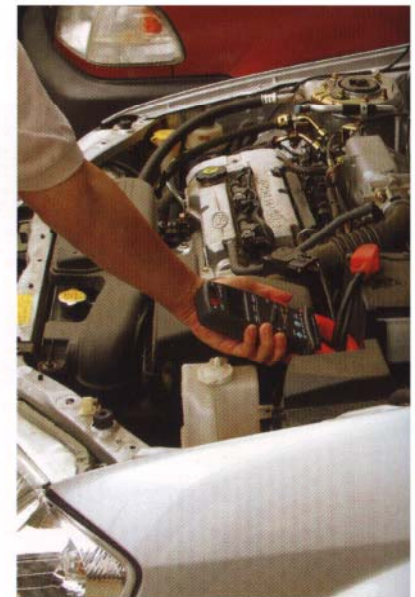

SPECIFICATIONS

Function	Range	Resolution	Accuracy
ACA	40A ~ 1000A	0.01A ~ 0.1A	± 1.9%rdg + 5dgts
DCA	40A ~ 1000A	0.01A ~ 1A	± 2%rdg + 5dgts
ACV	400V ~ 750V	0.1V ~ 1V	± 1.2%rdg + 5dgts
DCV	400V ~ 1000V	0.1V ~ 1V	± 0.75%rdg + 2dgts
Ohms	400Ω ~ 4000Ω	0.1Ω ~ 1Ω	± 1%rdg + 2dgts
Hz(A)	4KHz ~ 10KHz	1Hz	± 0.1%rdg + 1dgts
Hz(V)	4KHz ~ 10KHz	1Hz	± 0.1%rdg + 1dgts
· ·)	Active Sound Level: ≤ 50Ω		
→	0-2V		

Display	3-3/4 digital display(maximum reading 3999)
Sampling Rate	2 times/sec(digital reading) 20 times/sec(analog bar indication)
Battery	9V battery
Dimensions	242x66x36 mm
Weight	approx.500g
Jaw Opening Diameter	35mm(210/211), 40mm(212)