

CENTER 220 Series Mini CLAMP METER



CE IEC 1010 600V CAT II
300V CAT III

CENTER®

CENTER 220 Series MINI CLAMP METER


FEATURE

- Pocket Size
- DATA HOLD Function
- IEC 1010 600V CAT II 300V CAT III
- Autoranging (CENTER 221)

GENERAL SPECIFICATIONS

Display: 3-1/2 digital liquid crystal display

Sampling Rate: 2 Times/sec

Low Battery Indication: The  is displayed.

Battery Life: 1000hr approx.

Battery Type: 1.5V, Size AAA battery × 2

Operating Temperature: 0°C to 40°C

Storage Temperature: -10°C to 60°C

Dimensions: 187(L) × 50(W) × 29(H)mm

Weight: Approx. 200g (CENTER 220)

Approx. 210g (CENTER 221)

Accessories:

Carrying case, Battery, Instruction Manual, Test Lead (CENTER 221)

ELECTRICAL SPECIFICATIONS


CENTER 220

Function	Range	Resolution	Accuracy
ACA	20A	0.01A	±(2%rdg+5dgt)
	200A	0.1A	
	400A	1A	

CENTER 221

Function	Range	Resolution	Accuracy
ACA	200A	0.1A	±2%rdg+5dgt
	400A	1A	
ACV	200V	0.1V	±1.5%rdg+5dgt
	600V	1V	
Ohms	200Ω	0.1Ω	±1.9%rdg+3dgt
••••)	••••)	Active Sound Level: ≤100Ω	

• Jaw Opening Diameter: 25 mm

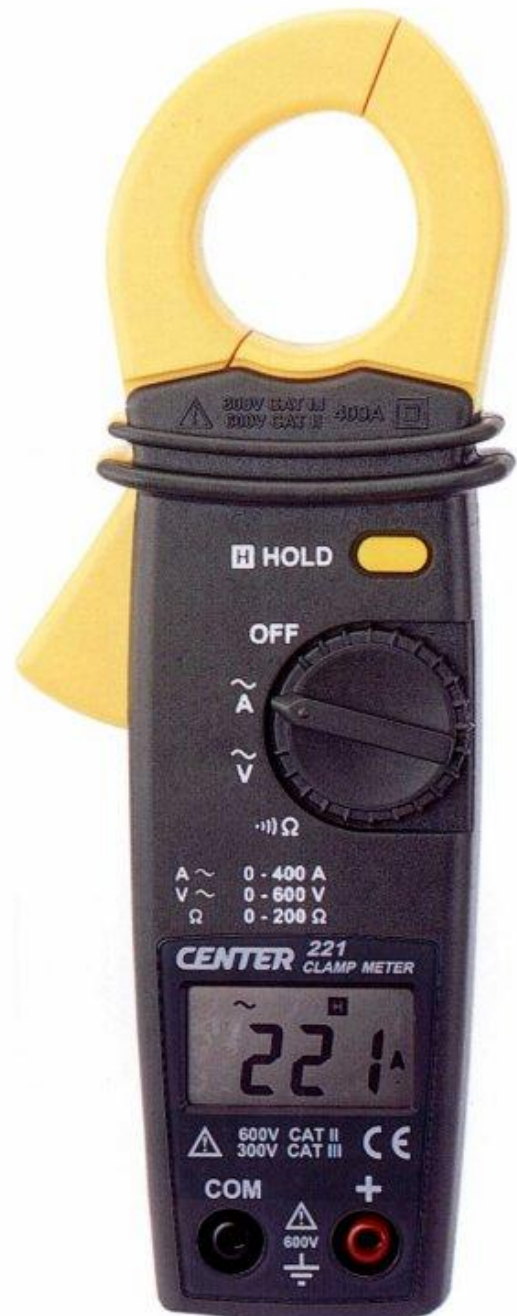

ACTUAL SIZE 1:1

* The specifications and other information in this catalogue are subject to change without prior notice.

CENTER[®]
CENTER TECHNOLOGY CORP.

Distributed by:

